


GÖLZ®



DIAMOND TOOLS 2025/2026

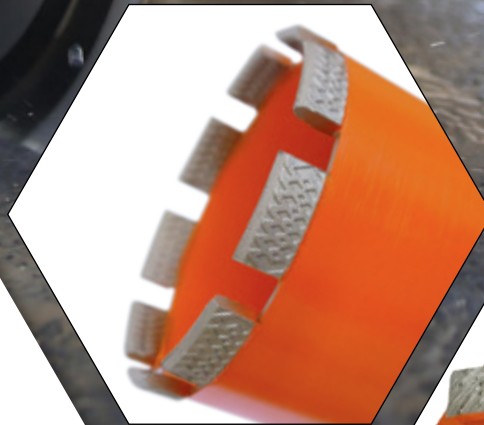

CONTENTS

A close-up, artistic photograph of a metallic surface, possibly a turbine blade or a similar industrial component. The surface is covered with numerous small, glistening water droplets. A circular, concentric pattern is visible on the left side, suggesting a curved or rotating part. The lighting is dramatic, with strong highlights and deep shadows, emphasizing the texture and curvature of the metal.

Prices valid as of 1st April 2025.

All prices are in EURO, ex works Hellenthal and do not include VAT.

All transactions are subject to our general terms and conditions.

© Copyright 2025 by Gölz GmbH Hellenthal.

CONTENTS


DIAMOND SAW BLADES	PAGE	6-49
DIAMOND SAW BLADES FOR ANGLE GRINDERS	PAGE	6-15
STEEL SAW BLADES FOR ANGLE GRINDERS	PAGE	16
DIAMOND RAKING BLADES FOR ANGLE GRINDER	PAGE	17
DIAMOND CUP GRINDERS FOR ANGLE GRINDERS	PAGE	18-20
DIAMOND BLADES FOR TILE AND MASONRY SAWS	PAGE	21-27
DIAMOND BLADES FOR FLOOR SAWS	PAGE	28-36
DIAMOND BLADES FOR CUT OFF SAWS	PAGE	37-44
DIAMOND CUTTING RINGS FOR HAND-HELD RING SAWS	PAGE	45
DIAMOND BLADES FOR WALL SAWS	PAGE	46-48
REDUCING RINGS / RECOMMANDATION CHART	PAGE	49-51
GRINDING AND POLISHING TECHNOLOGY	PAGE	52-56
DRY HOLLOW DRILLS & DIAMOND DRILL BITS + ACCESSORIES	PAGE	57-81
DIAMOND DRILL BITS, DRY	PAGE	58-60
TILE DRILLS	PAGE	61
DIAMOND DRILL BITS, WET	PAGE	62-73
DIAMOND DRILL BITS, WET, 3-HOLE-FLANGE	PAGE	74-75
DRILL BITS - RPM RECOMMENDATION CHART	PAGE	76
DIAMOND DRILL SEGMENTS & RINGSEGMENTS	PAGE	77-79
DRILL BIT ACCESSORIES	PAGE	80-81
DIAMOND WIRE / ACCESSORIES	PAGE	82

INFORMATION


MATERIALS




Marble, Natural and Cast Stone




Bricks, Clinker, hard Clinker, Stone, medium hard Clinker, Brickwork




Poroton




Tiles, Stoneware, hard Grounding



Reinforced Concrete



Pumice




Granite, thin Granite, Hard Stone



Wood




Asphalt, Lime Floor, Abrasive Material




Concrete, general Purpose, Exposed Aggregate Concrete, Concrete with hard Components, Cured Concrete



Iron, Steel



Cast Iron



Ceramics

MASCHINES / ICONS



Angle Grinder



Electric Cut Off Saw



Floor Saw



Grinding Machine



Wall Saw



Hand-Held Power Cut Off Saw



Electric Ring Saw



Tile/Bridge Saw



Stone Cutting Machine



Drilling Technic

INFORMATION

OUR COLOR CODE



Reinforces Concrete,
Concrete




Tiles,
Ceramics



Concrete Universal,
Bricks, Clinker, Stone



Granite,
Natural and Cast Stone



Asphalt,
abrasive Material

SPECIAL FEATURES




We've got a huge range of diamond blades which own a silent steel core, so it's noise reduced. We call it Whisper-technology.



Laser-welded Diamond
Blades and Diamond Drill
Bits are durable and
much more resistant.



The Organization for the Safety of Abrasives (oSa) makes working with cutting and grinding tools safer, every day, everywhere. Founded in 2000, oSa has grown to be known as the symbol almost 60 leading manufacturers (and growing!) of premium tools trust. oSa is the symbol for the highest safety worldwide and an internationally protected trademark. All members accept the safety standards EN 12413, EN 13236, EN 13743 for their products.



Ideal Performance due to special Diamond Technology

- Consistant Cutting Performance
- Ideal Life
- Constant Cutting Speed



**FOR ANGLE
GRINDER**

USE RECOMMENDATION

	CeraFast	DF 70	DF 70 LR	DS 16	DS 22	DS 26	DS 36	DS 42	DS 30	DTS 30	GX-U12	LGB 30	LT 30	LU 40	MX1	RX1	SG 15	SG 25	SLF 10	SLF 30	Stardust	Stardust Stahl	UG 25
General Purpose									●	●	●		●	●		●							
Asphalt																○							
Basalt												●									○		
Concrete				●	●	●	●	●	●	●	●	○	●	●	●	●					●		
Abrasive concrete											○												
Reinforced concrete										○	●		○	●	●	●					○		
Concrete products				●	●	●	●	●				○	●	●	●	●	○						
Concrete and hard components										○				●	●								
Pumice										○													
Roofing tile											○		○	●									●
Lime floor														○									
Fine Stone																				●			
Fireproof stone												●											
Tiles	●																●	●	●	●			
Granite							●				●	●	○			●	●	●	●	●	○		●
Cast iron												○									●		
Wood																					●		
Limestone															●								
Sand-lime brick highly compressed										○						●							
Ceramics	●										●					●	●	●	●	●			
Hard clincers / bricks									●	●	○			○	●	●							
Medium hard clincers / bricks									○	●	●		●	●	●	●							
Soft clincers / bricks										○	○			●	●	●							
Marble																●			●	●			●
Brickwork		●	●						○	●				○	●						●		
Poroton		●	●						●	○				○	●								
Porphyre												●	○		○		○	○					●
PVC																					●		
Quartzite																							
Sandstone									○		●					●							
Fire clay												●											
Slate													○	○									
Steel																					●	●	
Stoneware										●				○			●	●	●				
Exposed aggregate concrete									○		●		●	●	●	●							
Page		16	16	17	18	17	17	18	10	10	11	14	11	12	13	12	8	8	9	8	15	15	9

● well suitable ○ limited suitable

DIAMOND BLADES

ELECTRIC ANGLE GRINDER | DRY CUTTING


Tiles - Stoneware - Ceramics - Granite - Natural & Cast Stone



SG15 Turbo diamond blade - sintered

- Extremely thin
- Very fast cutting
- Steel core is strengthened in flange area
- Tiles, ceramics, granites, stone


Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
115	22,23	1,4	10,0	SG15 115	20,00
125	22,23	1,4	10,0	SG15 125	23,00
230	22,23	1,6	10,0	SG15 230	45,00

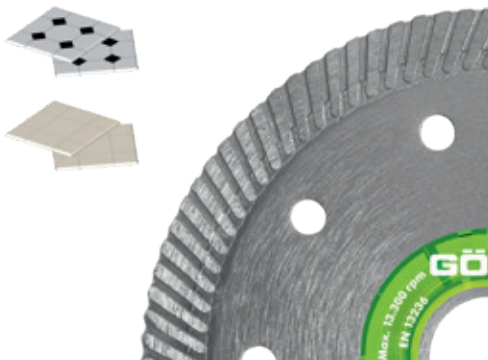

SG25 Turbo diamond blade - sintered

- Extremely thin
- Very fast cutting
- Clean cutting edge
- Tiles, ceramics, granites, stone

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
115	22,23	1,4	10,0	SG25 115	16,00
125	22,23	1,4	10,0	SG25 125	18,00
230	22,23	1,6	10,0	SG25 230	38,00

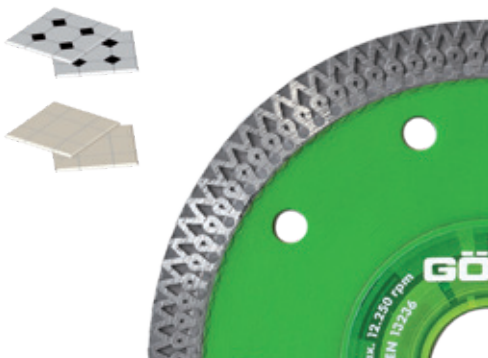

SLF30 Premium for hard materials


- Closed cutting rim in light turbo design
- Very hard porcelain stone ware, hard tiles and ceramics, thin granite, marble

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
115	22,23	1,4	10,0	SLF30 115	22,00
125	22,23	1,4	10,0	SLF30 125	27,00
230	22,23	2,0	10,0	SLF30 230	71,00

DIAMOND BLADES

ELECTRIC ANGLE GRINDER | DRY CUTTING

Tiles - Stoneware - Ceramics - Granite - Natural & Cast Stone



SLF10 Premium quality - sintered

- Closed cutting rim for clean and easy cutting
- Tiles, ceramics, fine matter, granite, marble


Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
115	22,23	1,4	6,5	0497 308 0115	22,00
125	22,23	1,4	6,5	0497 308 0125	24,00
180	22,23	1,8	5,5	0497 308 0180	39,00
230	22,23	2,0	5,5	0497 308 0230	47,00



CeraFast Premium Quality for Ceramics - sintered

- Highspeed Diamond Blade with an almost closed cutting edge for chip-free, precise cuts even in thicker ceramic products
- Hard ceramics, porcelain stoneware, tiles, oven tiles

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
125	22,23	1,8	10,0	0497 810 0125	26,00

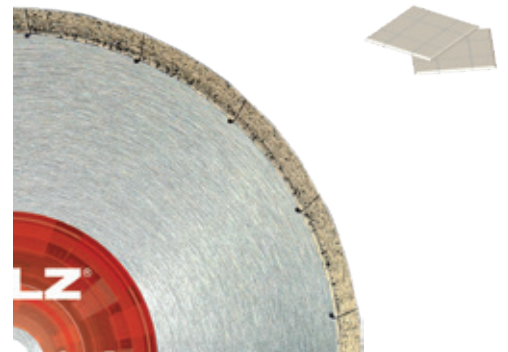

UG25 Turbo diamond blade - sintered

- Blade with closed cutting rim and turbo segment for natural stone
- Steel core protection
- Granite, Marble



Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
125	22,23	2,2	8,0	UG25 125	33,00
230	22,23	2,6	8,0	UG25 230	54,00



DIAMOND BLADE / GRINDING TOOLS


ELECTRIC ANGLE GRINDER | DRY CUTTING

For tiles, stoneware, ceramics, granite, natural and artificial stone

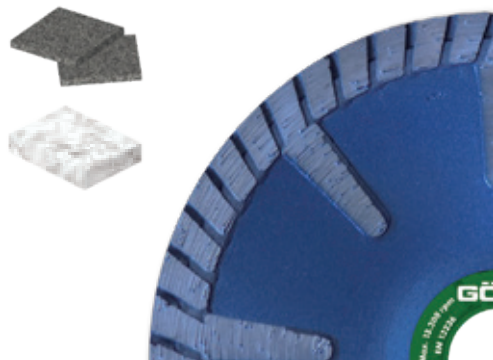


CL14 Turbo Concave Curved blade

- Concave carrier body for curved cutting
- Granite, marble, natural and artificial stone
- Deep protective segments for grinding of the cutting surface




Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
125	22,23	3,0	15,0	CL14125	88,00
180	22,23	3,2	15,0	CL14180	135,00

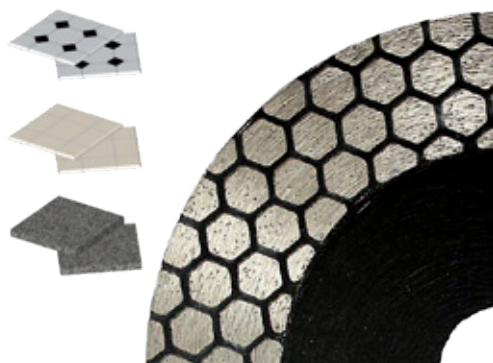

CL26 Premium Cutting and Grinding blade

- Ideal for 45° mitre cuts – very precise
- The special design of the segments offers excellent durability
- Tiles, porcelain stoneware, natural stone, marble and granite tiles

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
125	22,23	1,6	29	CL26197	62,00

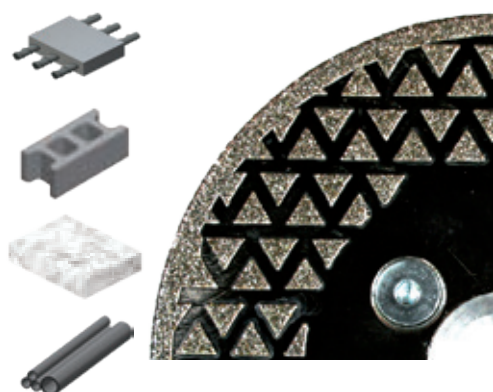

CP Blade for Cutting and Grinding

- Blade for cutting and deburring*, including M14 flange
- Stone, concrete, cast iron, PVC

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
125	M14	1,4	2,6	CP 125	49,00
230	M14	1,4	2,6	CP 230	98,00

*For occasional deburring, not for continuous use, not a replacement for grinding discs



CL24 Sanding pads for dry use

- For sanding and polishing of hard surfaces
- Natural stone, granite, marble, porcelain stoneware and ceramics

Ø (mm)	Moun- ting	Description	Order number	Price €
100	Velcro	Box with 4 pads grit 50, 100, 200 and 400 plus M14 adapter	CL24142	125,00
single pads in grit 50, 100, 200, 400, 800, 1500 and 3000				27,00

DIAMOND BLADES


ELECTRIC ANGLE GRINDER | DRY CUTTING

For general purpose

DS30 Universal - Sintered

- Blocksegment 10 mm height
- Best speed to life rate
- Concrete, bricks, clinkers, general purpose


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	34	1,6	10,0	8	DS30 115	9,00
125	22,23	34	1,6	10,0	9	DS30 125	12,00
150	22,23	42	2,0	10,0	9	DS30 150	14,00
180	22,23	36	2,0	10,0	13	DS30 180	16,00
230	22,23	39	2,3	10,0	16	DS30 230	22,00

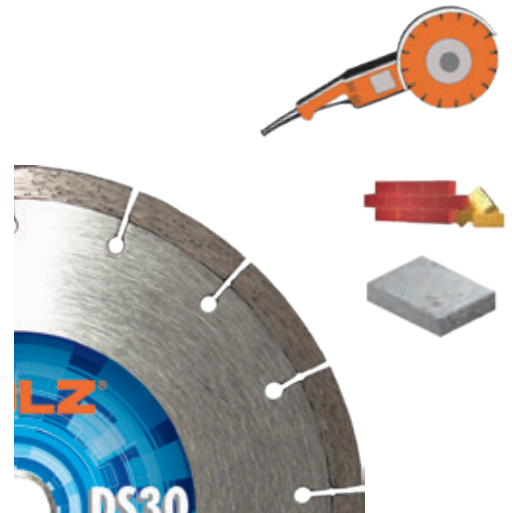

DTS30 Turbo - Sintered

- 10 mm Segment height
- Turbo segment for optimised cooling
- Concrete, bricks, hard clinkers, stone

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	34	2,0	10,0	8	DTS30 115	12,00
125	22,23	38	2,0	10,0	8	DTS30 125	13,00
150	22,23	38	2,3	10,0	10	DTS30 150	16,00
230	22,23	39	2,8	10,0	16	DTS30 230	25,00

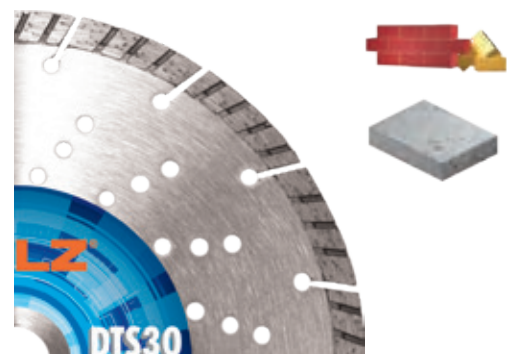

LT30 Laser-welded

- 10 mm Segment height
- Turbo segment for optimised cooling
- Concrete, reinforced concrete, bricks, middle hard clinkers, general purpose

LASER *



Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	32,0	2,2	10,0	9	0497 835 0115	14,00
125	22,23	32,0	2,2	10,0	10	0497 835 0125	17,00
150	22,23	32,0	2,2	10,0	12	0497 835 0150	22,00
180	22,23	32,0	2,4	10,0	14	0497 835 0180	27,00
230	22,23	38,0	2,6	10,0	16	0497 835 0230	31,00



DIAMOND BLADES

ELECTRIC ANGLE GRINDER | DRY CUTTING


For general purpose

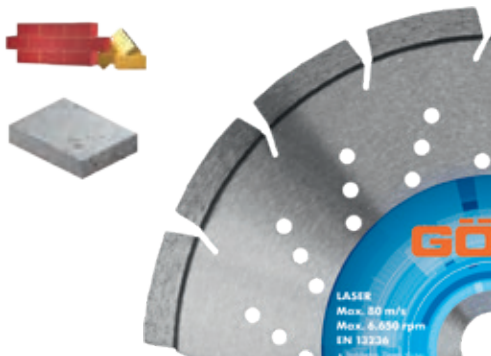

LU 40 Concrete Premium - laser-welded **LASER**

- 10 mm Segment height
- Very efficient with good life
- Concrete, reinforced concrete, bricks, clinkers, exposed aggregate concrete, stones, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	30,0	2,2	10,0	9	0497 364 0115	20,00
125	22,23	30,0	2,2	10,0	10	0497 364 0125	22,00
150	22,23	32,0	2,2	10,0	12	0497 364 0150	29,00
180	22,23	33,0	2,2	10,0	14	0497 364 0180	37,00
230	22,23	38,0	2,6	10,0	16	0497 364 0230	50,00

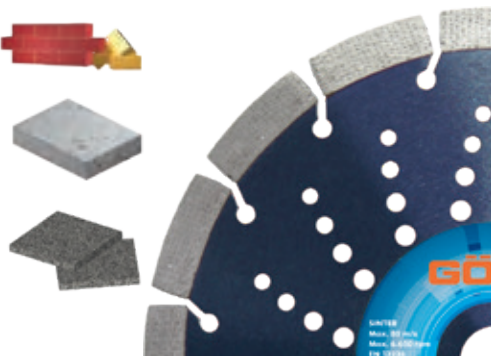

GX-U12 Sintered

GALAXIS
TECHNOLOGY

- 12 mm Segment height
- Diamond blade with precise diamond arrangement
- Concrete, exposed aggregate concrete, bricks, clinker, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	32,0	2,0	12,0	8	GX-U12 115	20,00
125	22,23	32,0	2,2	12,0	9	GX-U12 125	22,00
230	22,23	38,0	2,6	12,0	12	GX-U12 230	47,00



RX1 Allround - laser-welded

LASER

- 14 mm Turbosegment
- General purpose, concrete, bricks, exposed aggregate concrete, stone and granite

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	31,0	2,4	14,0	8	RX1 115	28,00
125	22,23	35,0	2,4	14,0	8	RX1 125	35,00
150	22,23	35,0	2,6	14,0	10	RX1 150	46,00
180	22,23	37,0	2,8	14,0	12	RX1 180	55,00
230	22,23	37,0	3,0	14,0	16	RX1 230	66,00

DIAMOND BLADES

ELECTRIC ANGLE GRINDER | DRY CUTTING

For general purpose




MX1 3-Step-Segment

- 14 mm Segment height
- Laser-welded
- Granite, clinkers, concrete, reinforced concrete, exposed aggregate concrete, bricks

LASER *

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
115	22,23	31,0	2,8	14,0	8	MX1115	37,00
125	22,23	35,5	2,8	14,0	8	MX1125	39,00
230	22,23	37,0	3,4	14,0	16	MX1230	79,00

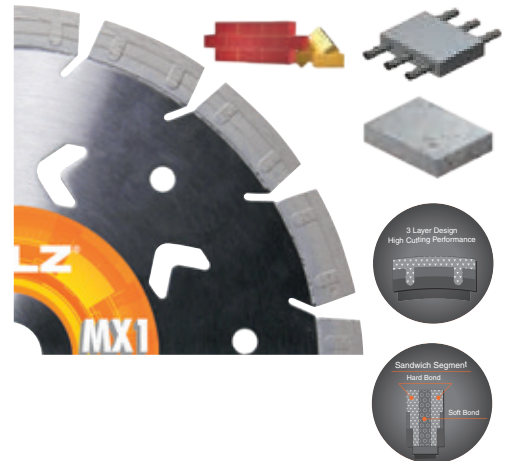


LGB30 Premium diamond blade

- Laser-welded
- 10 mm Turbsegment for optimised cooling
- Extremely hard granites

LASER *



Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	32,0	2,2	10,0	10	LGB30 125	54,00
230	22,23	38,0	2,6	10,0	16	LGB30 230	96,00

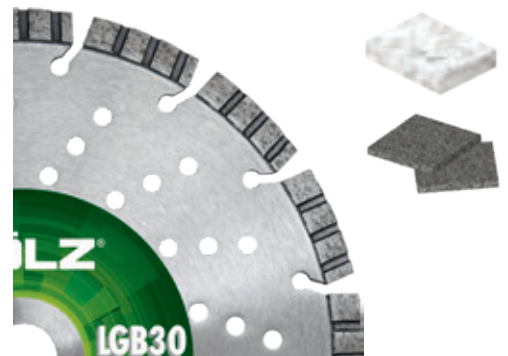

DIAMOND BLADES

ELECTRIC ANGLE GRINDER | DRY CUTTING

Diamond blades with flange for flush cutting

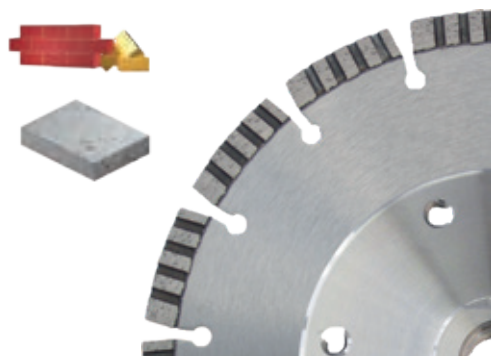


LT30 With Flange - Laser-welded

LASER *

- 10 mm Segment height
- TURBO Segmentation for optimized cooling
- Concrete, reinforced concrete, bricks, middle hard clinkers, general purpose

Ø (mm)	Flange / Bore	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	M14-Ø44/K32x4	32,0	2,2	10,0	10	0497 835 0126	42,00
230	M14-Ø75/TK64x6	38,0	2,6	10,0	16	0497 835 0231	74,00

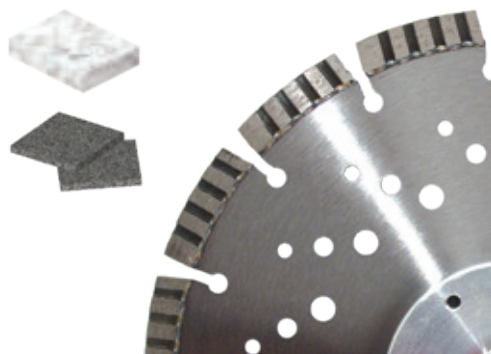

LGB30 With Flange - Premium diamond blade

LASER *

- Laser-welded
- 10 mm Turbosegment for optimised cooling
- Extremely hard granites

Ø (mm)	Flange / Bore	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	M14-Ø44/K32x4	31,0	2,4	10,0	10	LGB30 126	66,00
230	M14-Ø75/TK64x6	38,0	2,8	10,0	16	LGB30 231	108,00



Alu-Flange


- Aluminium flange for flush cutting
with diamond blade Ø 230 mm

Typ	Connection		Order number	Price €
Flange Ø 80 mm	M 14	64 (6 x M5)	0296 000 0113	28,00
Flange Ø 98 mm	22,2	84 (8 x M5)	0296 000 0115	28,00
Flange Ø 49 mm	M 14	37 (4 x M5)	0296 000 0118	16,00
Socket screw		M5	0296 000 0114	0,20

DIAMOND BLADES

ELECTRIC ANGLE GRINDER | DRY CUTTING


High-speed universal diamond cutting blades, electroplated



Stardust Universal Highspeed

- Superior cutting speed in nearly all materials
- No blade change needed
- Concrete, steel, stone, cast iron, PVC, wood

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
115	22,23	2,8	3,0	0396 802 0115	43,00
125	22,23	2,8	3,0	0396 802 0125	50,00
230	22,23	3,1	3,0	0396 802 0230	90,00

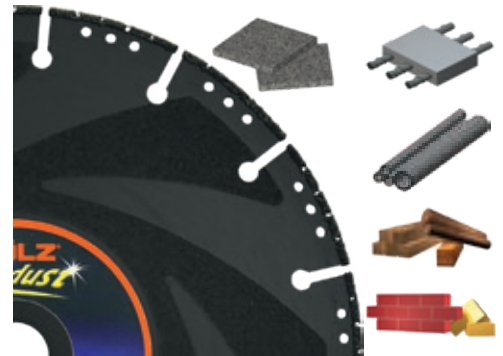

Stardust Steel Steell Highspeed

- Superior cutting speed in steel
- No cutting problems with slow and polished tools
- Steel

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
230	22,23	3,7	3,0	0497 804 0230	101,00



Quick-release flange nut



Specification	Order number	Price €
Quick-release flange nut M14 thread	0296 000 0126CL	32,00



STEEL SAW BLADES

ANGLE GRINDER

Cutting blades for steel and stainless steel



A24R Steel Cutting Blade

- Universally applicable for cutting metals
- Good durability and fast cutting at an affordable price

Ø (mm)	Bore (mm)	Width (mm)	Order number	Price €/Piece	unit
115	22,23	3	DR 111 2015-100	1,30	25
125	22,23	3	DR 112 2015-339	1,70	25
230	22,23	3	DR 123 2015-339	4,00	25



A30T Rough Grinding Blade

- For grinding and deburring steel
- Long service life

Ø (mm)	Bore (mm)	Width (mm)	Order number	Price €/Piece	unit
115	22,23	6,0	DR 311 6040-100	2,20	10
125	22,23	6,0	DR 312 6040-339	2,40	10
230	22,23	6,0	DR 323 6041-100	6,40	10



AS46T Stainless Steel Cutting Blade

- Suitable for normal and stainless steel, especially for sheets and thin-walled profiles
- The standard in tank and container construction
- Iron and sulphur-free, high cutting speed, long service life, almost no burr formation

Ø (mm)	Bore (mm)	Width (mm)	Order number	Price €/Piece	unit
115	22,23	1,6	DR 111 1250-100	1,60	25
125	22,23	1,6	DR 112 1250-339	1,55	25
230	22,23	2,0	DR 123 1255-339	4,10	25



AS60T Extra-thin Inox Cutting Blade

- Efficient cutting for stainless steel

Ø (mm)	Bore (mm)	Width (mm)	Order number	Price €/Piece	unit
115	22,23	1,0	DR 111 1240-100	1,70	25
125	22,23	1,0	DR 112 1240-339	1,55	25

DIAMOND RAKING BLADES


ELECTRIC ANGLE GRINDER | DRY CUTTING

Diamond Raking Blades for milling

DF70 Diamond raking blade - standard

- Brickwork, joints

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	32,0	6,4	6+1	10	0296 367 6125	61,00

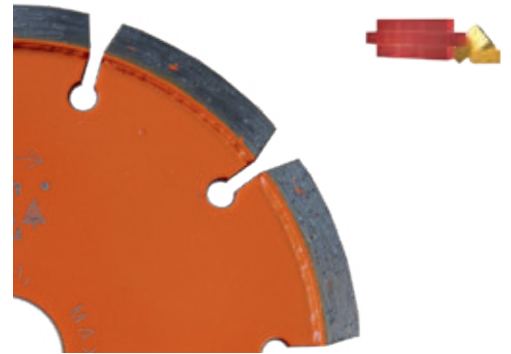

DF70LR Diamond raking blade

- Offset segments and TCT protection segments
- Undercut protection segments
- Brickwork, joints

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	34,0	5 (10)	7,0	10+5	0296 367 6125LR	132,00



DF70V crack cutter with V-segment

- Widening and chamfering wild cracks
- Repair work on walls, floors, and road surfaces
- Old concrete, concrete, screed, and masonry


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	32,0	10,0	13	10	0296 367 6130	142,00



DIAMOND CUP GRINDER

ELECTRIC ANGLE GRINDER | DRY CUTTING

For dry grinding in Concrete and Natural Stone



DS16 TURBO cup grinder - concrete and hard stone

- Special T-Segment for high stability and fast material removal
- For Concrete Grinder and Angle Grinder
- Big holes for cooling and dust suction
- Stable and constant running time
- For surface grinding of general building material

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	23	11,8	5,0	8	DS16 125	45,00
150	22,23	28	13,3	5,0	10	DS16 150	58,00
180	22,23	30	14,6	5,0	12	DS16 180	71,00



DS26 Standard

- Special Triangle-Segment for fast material removal
- For Concrete Grinder and Angle Grinder
- Big holes for cooling and dust suction
- Stable and constant running time
- For surface grinding of general building material

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	25	14	5,5	7	DS26 125	49,00
180	22,23	30	14	5,5	10	DS26 180	79,00



DS36 TURBO cup grinder - concrete and hard stone


- Dust extraction system possible
- Natural and cast stone, granite, hard surfaces

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
125	22,23	5,0	7,0	0497 336 0125	65,00
150	22,23	5,0	7,0	0497 336 0150	84,00
180	22,23	5,0	7,0	0497 336 0180	101,00

DIAMOND CUP GRINDER

ELECTRIC ANGLE GRINDER | DRY CUTTING


For dry grinding in Concrete and Natural Stone



DS22 Diamond cup grinder - Standard

- Double Segment row
- Concrete general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
125	22,23	25/32	7,5	5,0	20	DS22 125	54,00
180	22,23	28/35	8,0	6,0	24	DS22 180	85,00
230	22,23	28/32	8,0	5,5	36	DS22 230	122,00

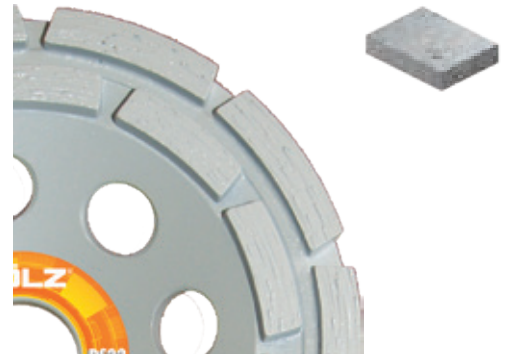


DS42 Diamond cup grinder - Premium

- Double Segment row
- Best life and grinding performance
- Concrete, medium hard surfaces, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
105	22,23	30	5,0	8,0	16	0497 342 0105	60,00
125	22,23	25/32	5,0	7,5	20	0497 342 0125	70,00
125	M14	32,0	4,5	7,0	20	0497 442 0125	70,00
180	22,23	28/38	5,5	8,0	24	0497 342 0180	101,00
180*	22,23	35	4,5	7,0	24	0497 342 0181	101,00

*30 mm high

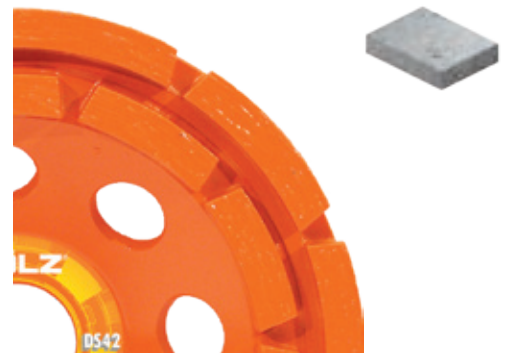

DIAMOND CUP GRINDER

ELECTRIC ANGLE GRINDER | DRY GRINDING

Special grinding disc with PCD segments



PKD Polycrystalline Diamond Cup Grinder – Fine

- for milling off masonry and plaster
- perfect for removing adhesives, epoxy paint, synthetic resin plaster


Ø (mm)	Bore (mm)	Quantity Segments	Order number	Price €
125	22,23	12	PKD-F-125	158,00



PKD Polycrystalline Diamond Grinding Disc – Coarse

- for milling off masonry and plaster
- perfect for removing adhesives, epoxy paint

Ø (mm)	Bore (mm)	Quantity Segments	Order number	Price €
125	22,23	6	PKD-B-125	205,00

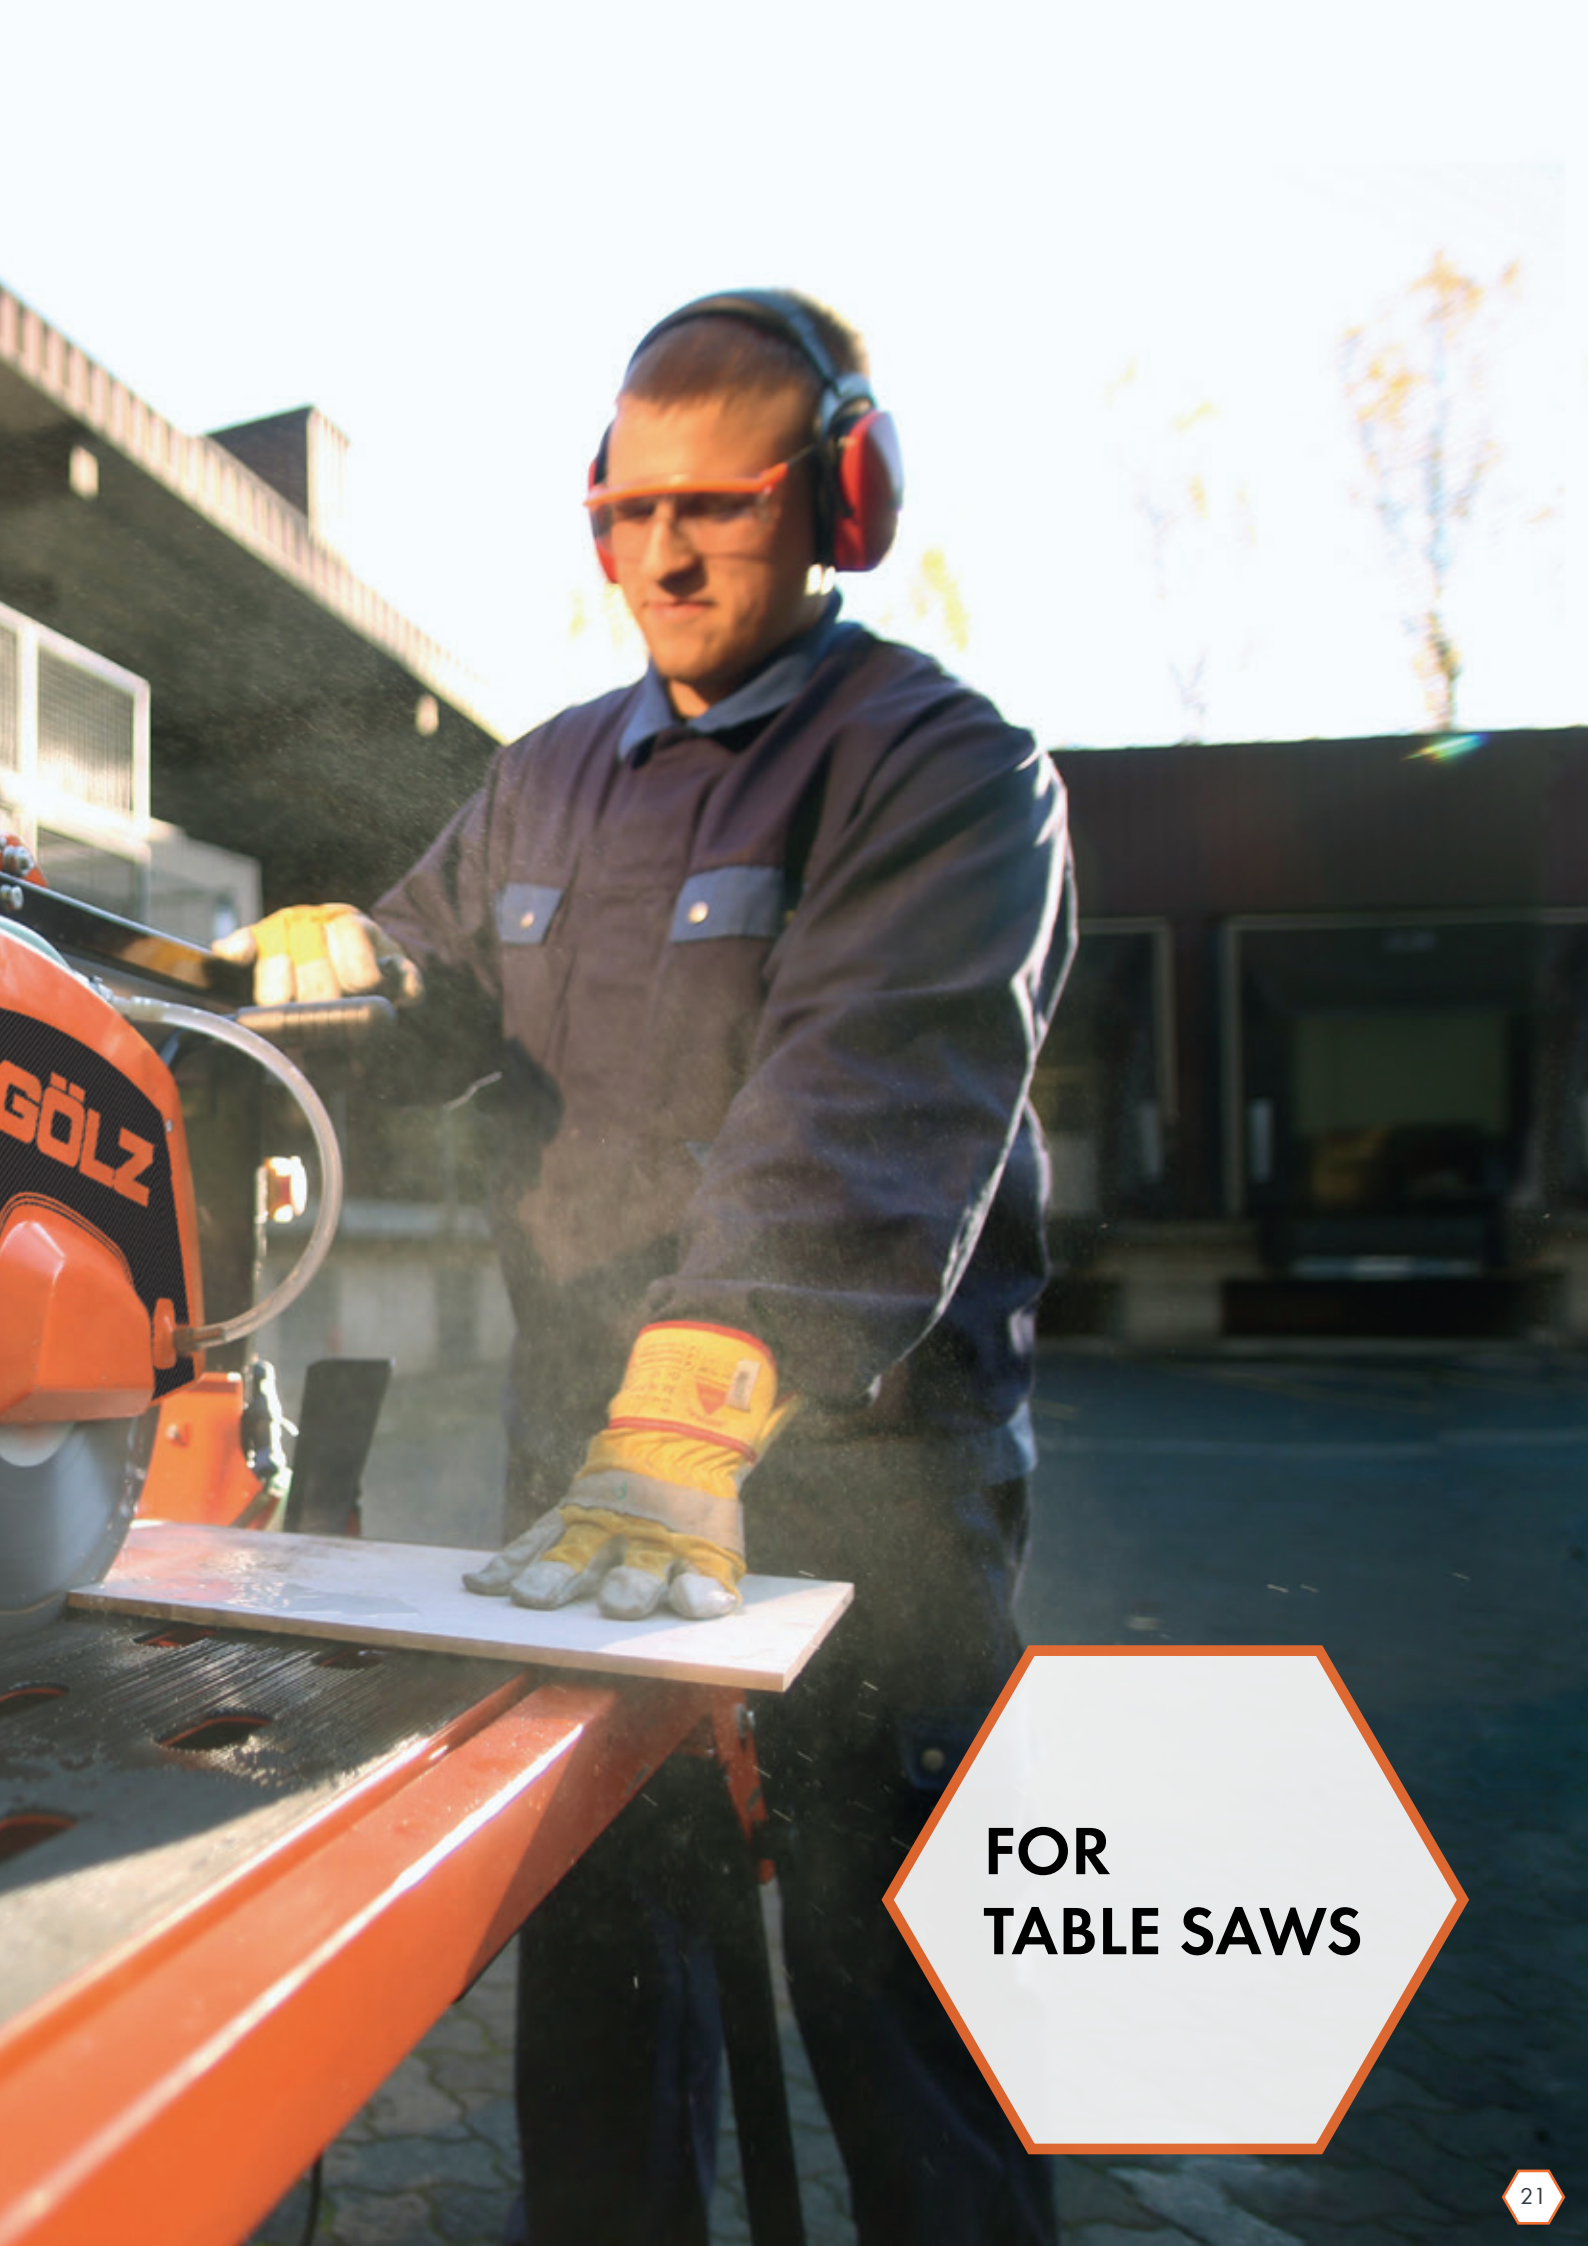


**FOR
TABLE SAWS**

USE RECOMMENDATION



	BS 30	CT 30	Galaxis-S	GN25	GN30	GN30N	LT30	RX1S	SG 35	SLF 10	SLF 20	SLF 30	SlimFast	UG25
General purpose			●				●	●	○					
Asphalt			○					○						
Basalt									●					
Concrete		●	●				●	●	●					
Reinforced concrete		○					●		○					
Concrete products		●					●	●						
Pumice	●													
Fireproof stone				●	●	●			○					
Tiles										●	●	●	●	●
Aerated concrete	●													
Granite			●	●	●	●		●	●	●	●	●	●	●
Limestone	●													
Sand-lime brick highly compressed			●					●						
Ceramics										●	●	●	●	●
Hard clincers / bricks			○				○	●						
Medium hard clincers / bricks			●				○	●	●					
Soft clincers / bricks	●		●				●	●						
Marble			●					●		●	●	●	●	●
Poroton	●													
Porphy				●	●	●			●					
Quartzite									●					
Sandstone	●		●	●	○	○		●						
Fire clay				●	●	●			○					
Stoneware										●	●		●	●
Exposed aggregate concrete		●	●				●	●	●					
Page	25	25	23	22	22	22	26	24	24	21	21	21	21	22

● well suitable ○ limited suitable

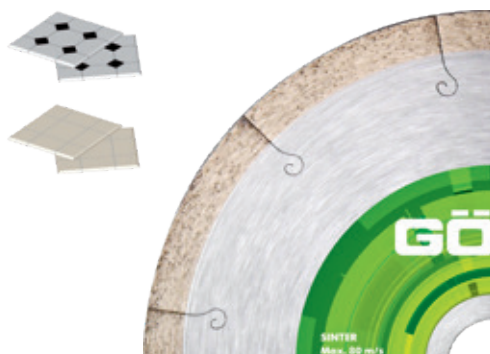

SLF10 Premium quality - sintered

- Premium Diamond Blade for professional use on tile saws
- Tiles, ceramics, fine matter, granite, marble

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
200	25,4	1,8	6,5	0497 308 0201	42,00
250	25,4	2,0	6,5	0497 308 0251	48,00

DIAMOND BLADES

TILE SAW | WET CUTTING


Diamond Blades with castellated rim for Tile Saws and Bridge Saws



SlimFast sintered

- Highspeed Diamond Blade
- Tiles, ceramics, fine matter, granite, marble
- For optimal cutting on tile and table saws


Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
200	25,4	2,0	7,5	0497 806 0201	46,00
250	25,4	2,0	7,5	0497 806 0251	59,00
300	25,4	2,0	7,5	0497 806 0301	88,00
350	25,4	2,0	7,5	0497 806 0351	97,00

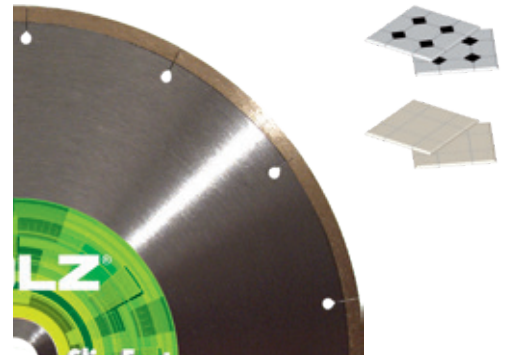

SLF20 Premium plus quality - silver brazed

- Highspeed Diamond Blade for professional use on bridge saws
- Porcelain stone ware, tiles, ceramics, fine matter, granite, marble
- High quality Diamond Blade with Cobalt-Bronze-Bond


Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
250	25,4	2,2	10,0	0497 306 0251	95,00
300	30,0/25,4	2,2	10,0	0497 306 0300	132,00
300	25,4	2,2	10,0	0497 306 0301	132,00
350	30,0/25,4	2,4	10,0	0497 306 0350	171,00
350	25,4	2,4	10,0	0497 306 0351	171,00

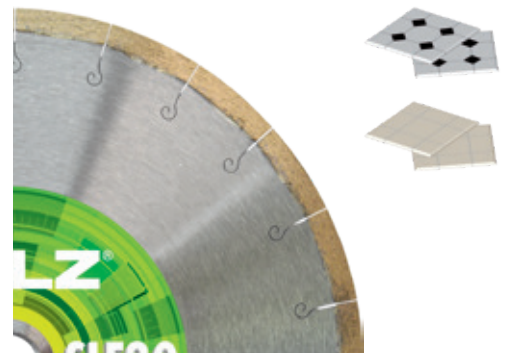

SLF30 Premium for hard materials


- Closed cutting rim in light turbo design
- Very hard porcelain stone ware, hard tiles and ceramics, thin granite, marble

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
200	25,4	2,0	10,0	SLF30 201	62,00
250	25,4	2,0	10,0	SLF30 251	79,00
300	25,4	2,0	10,0	SLF30 301	117,00
350	25,4	2,0	10,0	SLF30 351	152,00

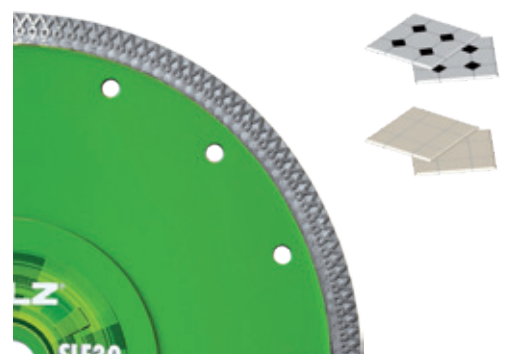

DIAMOND BLADES


BRIDGE SAW | WET CUTTING

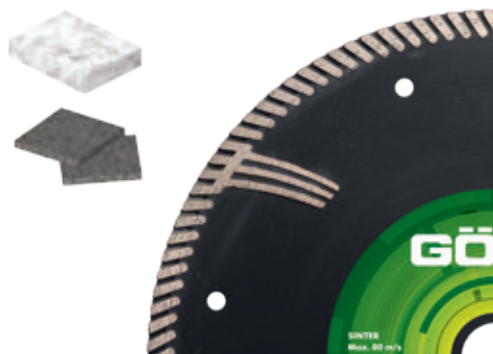

UG25 Turbo diamond blade - sintered

- Blade with closed cutting rim and turbo segment for natural stone
- Steel core protection
- Granite, Marble

Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		W	H		
300	25,4	3,2	9	UG25301	99,00
350	25,4	3,4	9	UG25351	154,00

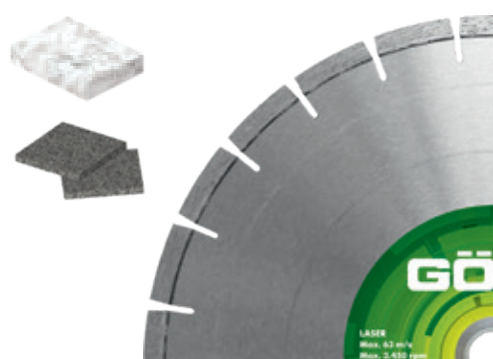


GN25 Granite standard - laser-welded

LASER *

- Diamond Blade with special cutting bond for hard materials
- For bridge saws up to 5 kW
- Granite, hard stone


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	30,0/25,4	40,0	3,2	10,0	24	GN25 350	108,00
350	25,4	40,0	3,2	10,0	24	GN25 351	108,00
400	30,0/25,4	40,0	3,6	10,0	28	GN25 400	129,00

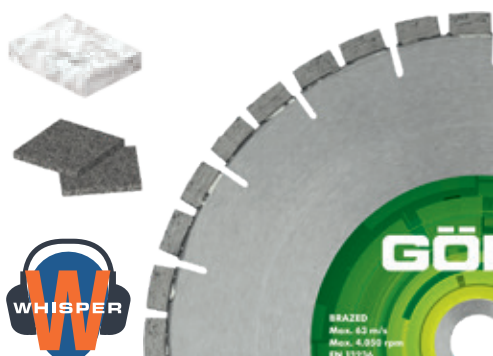

GN30 Granite Premium - silver brazed

- Diamond blade with short segments for fast cutting
- Silent-steel-core for silent working
- For bridge saws up to 5 kW
- Granite, hard stone

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	25,4	20,0	2,8	10,0	36	GN30 300	132,00
350	25,4	20,0	3,2	10,0	42	GN30 350	151,00
400	25,4	20,0	3,6	10,0	48	GN30 400	188,00
600	60,0	20,0	5,0	10,0	74	GN30 600	445,00

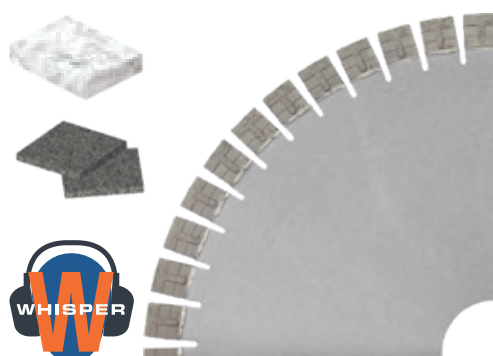

GN30N Granit Premium Plus - silver brazed

- Professional Diamond blade with 3 layer design and 20 mm Segments height
- Silent-steel-core for silent working
- For bridge saws up to 10 kW
- Granite, hard stone

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
400	60,0	20,0	3,8	20,0	48	GN30N 400	208,00
450	60,0	20,0	4,5	20,0	56	GN30N 450	314,00
500	60,0	20,0	4,5	20,0	60	GN30N 500	354,00
600	60,0	20,0	5,0	20,0	74	GN30N 600	533,00

DIAMOND BLADES

MASONRY SAW | WET CUTTING

Concrete and general purpose




Galaxis-S Allround - laser-welded

LASER *

- Silent wet cutting blade for less cutting noise
- 15 mm high segments
- General purpose, concrete, bricks, exposed aggregate concrete, stone and granite
- Diamond patterned technology

GALAXIS TECHNOLOGY

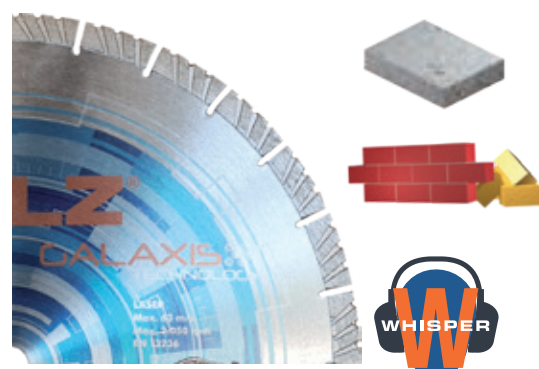


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	25,4	38,0	3,0	15,0	20	GXS 301	139,00
350	25,4	38,0	3,0	15,0	24	GXS 351	169,00
400	25,4	38,0	3,2	15,0	28	GXS 401	198,00

DIAMOND BLADES

MASONRY SAWS | DRY & WET CUTTING

For Table Saw, Concrete Universal, Exposed aggregate concrete, Hard stone



LT30 Concrete - Laser-welded

LASER *

- 10 mm Turbo-Segment
- excellent cutting speed
- Concrete, stone, bricks, middle hard clinkers, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	25,4	40,0	2,8	10,0	20	LT30 301	73,00
350	25,4	40,0	3,2	10,0	24	LT30 351	88,00
400	25,4/20,0	40,0	3,4	10,0	28	LT30 405	129,00




RX1S Universal - laser-welded

LASER *

- 16 mm Segment height
- Universal Diamond Blade for Masonry Saws
- Detenso steel-core
- Fast cutting, good life
- Concrete, exposed aggregate, bricks, clinker, granite, hard stone, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	25,4	40,0	3,2	16,0	20	RX1S 301	131,00
350	25,4	40,0	3,4	16,0	24	RX1S 351	151,00
400	25,4	40,0	3,4	16,0	28	RX1S 401	172,00
450	25,4	40,0	3,6	16,0	32	RX1S 450	203,00
500	25,4	40,0	4,5	16,0	36	RX1S 500	274,00
600	25,4	40,0	4,5	16,0	40	RX1S 600	389,00
650	25,4	40,0	4,2	16,0	44	RX1S 650	475,00



SG35 Granite turbo - laser-welded

LASER *

- 10 mm Turbosegment für optimised cooling
- Narrow toothed - silent design
- Granite, hard stone, natural and cast stone, stone, hard clinkers

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	30,0/25,4	31,0	2,8	10,0	20	0396 327 0300	121,00
350	30,0/25,4	31,0	2,8	10,0	24	0396 327 0350	148,00
350	25,4	31,0	2,8	10,0	24	0396 327 0351	148,00
400	30,0/25,4	31,0	3,2	10,0	30	0396 327 0400	202,00
450	30,0/25,4	31,0	3,4	10,0	34	0396 327 0450	243,00
500	25,4	31,0	4,5	10,0	38	0396 327 0501	335,00
600	25,4	31,0	4,5	10,0	44	0396 327 0601	466,00
650	60	31,0	4,5	10,0	48	0396 327 0650	499,00

DIAMOND BLADES

MASONRY SAWS | WET CUTTING

For Block Saws, Brickwork and abrasive Block stones



CT30 Concrete Standard - laser-welded

LASER *

- 10 mm Turbosegment
- Good cutting performance
- For MS600A / MS700A
- General purpose, concrete, reinforced concrete



Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	25,4	40,0	4,0	10,0	42	CT30 601	254,00
700	25,4	40,0	4,2	10,0	50	CT30 701	453,00
700	30,0*	40,0	4,2	10,0	50	CT30 705	453,00

* for MS700A



Diamond Blade for abrasive material on Block Saws



BS30 Limestone standard

LASER *

- 10 mm Segment height
- Laser-welded
- Sandstone, poroton, pumice, bricks, abrasive concrete

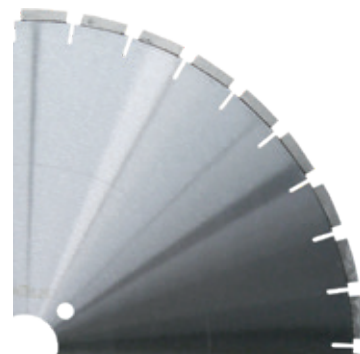

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
625	60,0	40,0	4,4	10,0	34	0396 329 0625	232,00
650	60,0	40,0	4,4	10,0	36	0396 329 0650	266,00
700	60,0	40,0	4,4	10,0	40	0396 329 0700	295,00
900	60,0	40,0	4,8	10,0	46	0396 329 0900	355,00
1000	60,0	40,0	4,8	10,0	56	0396 329 1000	632,00



**FOR
FLOOR SAWS**

DIAMOND BLADES

FLOOR SAWS | DRY & WET CUTTING

User recommendation



	CT 30	CT 40	LBA60	LCA 65	Allmix	CS 21	CS 23	CS 26GX	FB10	AS 60	AS 75	GX-A80	AS 20	AS 22	AS 25
Asphalt			●	●	●					●	●	●	●	●	●
Concrete	●	●	●	●	●	●	●	●							
Abrasive concrete		○													
Reinforced concrete	○	●				●	●	●							
Concrete products	●	●		●	●										
Concrete and hard components		●													
Lime floor			●							●		●	●		●
Fresh concrete			○						●	○		○	○		
Brickwork				●	●				●						
Exposed aggregate concrete	●	●													
Page	30	30	31	31	31	32	32	32	33	35	35	35	36	36	36


● well suitable

○ limited suitable

DIAMOND BLADES

FLOOR SAWS | DRY & WET CUTTING


Concrete Saws



CT30 Concrete Standard - laser-welded **LASER**

- 10 mm Turbosegment
- Good cutting performance
- For floor saws up to 7,5 kW
- General purpose, concrete, reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	2,8	10,0	24	CT30 351	86,00
400	25,4	40,0	3,2	10,0	28	CT30 401	126,00
450	25,4	40,0	3,2	10,0	32	CT30 451	149,00
500	25,4	40,0	3,2	10,0	36	CT30 501	187,00
600	25,4	40,0	4,0	10,0	42	CT30 601	255,00
700	25,4	40,0	4,2	10,0	50	CT30 701	455,00



CT40 Concrete Premium - laser-welded **LASER**

- 10 mm Turbosegment
- Excellent life
- For floor saw up to 11 kW
- Concrete, reinforced concrete, concrete with hard aggregates

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	2,8	10,0	24	CT40 351	117,00
400	25,4	40,0	3,2	10,0	28	CT40 401	148,00
450	25,4	40,0	3,6	10,0	32	CT40 451	190,00
500	25,4	40,0	3,6	10,0	36	CT40 501	226,00
600	25,4	40,0	4,0	10,0	40	CT40 601	337,00

DIAMOND BLADES

FLOOR SAWS | DRY & WET CUTTING


Allround Diamond Blades for concrete and Asphalt. Brand New Mix-Segment Constellation!



LBA60 Allround Standard - laser welded **LASER** *

- 10 mm turbo segment
- fast cutting, good compromise between concrete and asphalt
- Concrete, asphalt and abrasive materials


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	2,8	10,0	24	LBA60 351	91,00
400	25,4	40,0	3,2	10,0	28	LBA60 401	115,00
450	25,4	40,0	3,6	10,0	32	LBA60 450	143,00

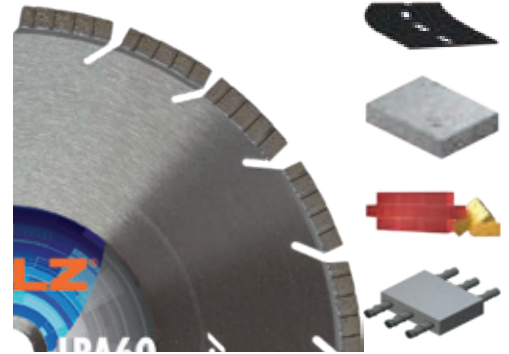

LCA65 Allround - laser-welded **LASER** *

- 10 mm Segment height
- Turbo/Flat Segments for abrasive to hard materials
- Concrete, asphalt, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	25,4	40,0	3,2	10,0	20	LCA65 301	88,00
350	25,4	40,0	3,2	10,0	24	LCA65 351	105,00
400	25,4	40,0	3,6	10,0	28	LCA65 401	132,00
450	25,4	40,0	3,4	10,0	32	0497 865 0450	163,00
500	25,4	40,0	3,6	10,0	34	0497 865 0501	202,00

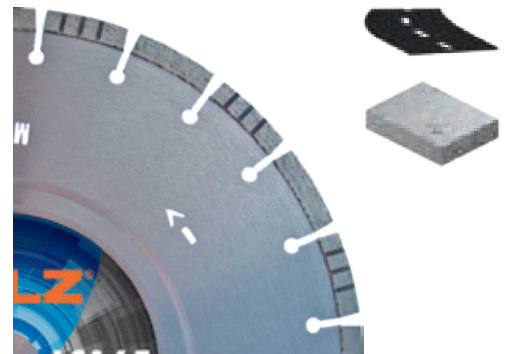

Allmix laser-welded **LASER** *

- 10 mm segment height
- Dry- and wet-cutting
- Turbo/Flat Segments for abrasive to hard materials
- Excellent life and fast cutting
- Concrete, asphalt and brickwork

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	25,4	40,0	3,2	10,0	20	0497 870 0301	112,00
350	25,4	40,0	3,2	10,0	24	0497 870 0351	130,00
400	25,4	40,0	3,6	10,0	28	0497 870 0401	173,00
450	25,4	40,0	3,6	10,0	32	0497 870 0451	197,00
500	25,4	40,0	3,6	10,0	34	0497 870 0501	224,00



DIAMOND BLADES

FLOOR SAWS | WET CUTTING

Concrete



CS21 Concrete, Reinforced Concrete - laser-welded

LASER *

- 14 mm Segment height
- For floor saws from 7,5 kW up to 11 kW
- Concrete, reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	25,4 + NL	30,0	3,8	14,0	46	CS21 600	365,00
700	25,4 + NL	30,0	3,8	14,0	54	CS21 700	497,00
800	25,4 + NL	30,0	3,8	14,0	62	CS21 800	604,00




CS23 Concrete, Reinforced Concrete - laser-welded

LASER *

- 14 mm Segment height
- For floor saws from 15 kW
- Concrete, reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	25,4 + NL	30,0	4,0	14,0	46	CS23 600	390,00
700	25,4 + NL	30,0	4,0	14,0	54	CS23 700	522,00
800	25,4 + NL	30,0	4,0	14,0	62	CS23 800	631,00
1000	25,4 + NL	30,0	42	14,0	78	CS23 1000	904,00

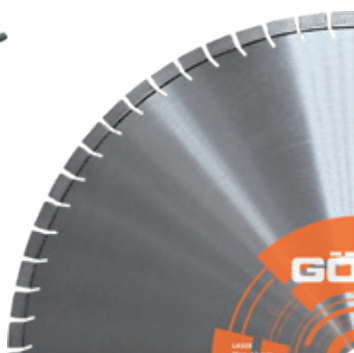

CS26GX Beton – Lasergeschweiß

LASER *

GALAXIS TECHNOLOGY



- 15 mm Segment height
- systematic diamond arrangement for best cutting performance
- For floor saws from 35 kW
- Concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	25,4	30,0	4,5	15,0	54	CS26GX 60045	485,00
700	25,4	30,0	4,5	15,0	62	CS26GX 70045	645,00
800	25,4	30,0	4,5	15,0	72	CS26GX 80045	775,00

DIAMOND BLADES

FLOOR SAWS | DRY & WET CUTTING

Diamond Cutter and Chamfering

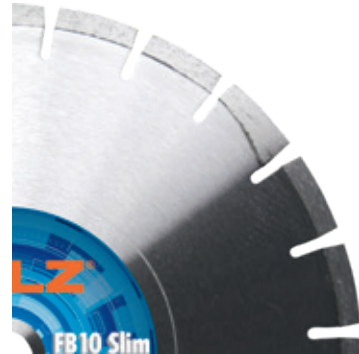

FB10 Fresh Concrete - laser-welded

LASER *

- 10 mm Segment height
- with recessed protective segments to prevent undercutting
- for floor saws up to 13 kW

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	2,8	10,0	24	0297 272 0350	194,00

Chamfering 2-pieces/set

- Chamfering of joint up to 45°, recommended rim speed 55m/s
- For joint width from 2 mm up to 25 mm
- 1 set (2 parts)
- Green concrete with hard and medium hard components

Dimension (mm)	Bore (mm)	Order number	Price €
280 x 14 x 3,6	nach Wahl	028.818.92	1.798,00



Chamfering 1-piece

- Chamfering of joint up to 45°, recommended rim speed 55m/s
- For joint width up to 10mm
- Green concrete with hard and medium hard components

Dimension (mm)	Bore (mm)	Order number	Price €
280 x 12 x 6	nach Wahl	028.888.92	1.188,00



DIAMOND MILLING CUTTER

FLOOR SAWS | DRY & WET CUTTING



Loop Cutter

- Diamond milling cutter for concrete
- For floor saws from 10 to 25 kW
- For milling joints for induction loops or glass fibre optic cables in old concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
L	W	H	Qty				
350	25,4	51,0	10,0	8+2	19	0397 825 0350-10	330,00



Diamond Milling Cutter Concrete

- Joint Milling for concrete, such as induction loops in industry halls

Ø (mm)	Dimension (mm)	Bore (mm)	Order number	Price €
350	350 x 6,0 x 7	25,4	135.267.06	547,00
350	350 x 10,0 x 7	25,4	136.207.06	690,00
400	400 x 10,0 x 7	25,4	142.207.06	720,00



Diamond Milling Cutter Asphalt

- Joint Milling for asphalt, such as induction loops for traffic lights

Ø (mm)	Dimension (mm)	Bore (mm)	Order number	Price €
350	350 x 6,0 x 6,5	25,4	135.266.91	456,00
350	350 x 10,0 x 6,5	25,4	137.206.91	565,00
400	400 x 8,0 x 6,5	25,4	140.286.91	599,00
400	400 x 10,0 x 6,5	25,4	141.206.91	659,00

DIAMOND BLADES

FLOOR SAWS | DRY & WET CUTTING

Asphalt Saws



AS60 Asphalt Standard - Laser-welded **LASER** *

- 10 mm Segment height
- For Floor Saws up to 7,5 kW
- Asphalt, lime floor, medium hard clinker, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	2,8	10,0	24	AS60 351	83,00
400	25,4	40,0	3,2	10,0	28	AS60 405	109,00
450	25,4	40,0	3,6	10,0	32	AS60 451	142,00
500	25,4	40,0	3,6	10,0	36	AS60 501	172,00



AS75 Asphalt Premium - Laser-welded **LASER** *

- 10 mm Segment height
- With recessed protective segments to prevent undercutting
- For Floor Saws up to 11 kW
- Asphalt, lime floor, abrasive material

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	2,8	10,0	21	AS75 351	102,00
400	25,4	40,0	3,2	10,0	24	AS75 401	138,00
450	25,4	40,0	3,4	10,0	28	AS75 451	163,00
500	25,4	40,0	3,4	10,0	30	AS75 501	204,00
600	25,4	40,0	4,0	10,0	36	AS75 601	265,00



GX-A80 Asphalt Premium - Laser-welded

- 10 mm Segment height
- With recessed protective segments to prevent undercutting
- For Floor Saws up to 15 kW
- Asphalt, lime floor, abrasive material
- Precise diamond arrangement

LASER *

GALAXIS TECHNOLOGY

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	25,4	40,0	3,2	12,0	24	GX-A80 351	169,00
400	25,4	40,0	3,6	12,0	28	GX-A80 401	198,00
450	25,4	40,0	3,6	12,0	32	GX-A80 451	244,00



DIAMOND BLADES

FLOOR SAWS | WET CUTTING

Asphalt Saw for powerfull Floor Saws



AS20 Asphalt Classic - Laser-welded

LASER *

- With deep segments for undercut protection
- good life time in Asphalt
- For Floor Saws up to 10 kW
- Asphalt

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
500	25,4	40,0	3,6	10,0	36	AS20 50036	203,00
600	25,4	40,0	4,0	10,0	42	AS20 60040	295,00
700	25,4	40,0	4,6	10,0	45	AS20 70046	462,00
800	25,4	40,0	4,8	10,0	52	AS20 80048	608,00



AS22 Asphalt Standard - Laser-welded

LASER *

- 10 mm Segment height
- With deep segments for undercut protection
- For Floor Saws from 15 kW
- Asphalt

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
500	25,4	40,0	3,6	10,0	36	AS22 50036	299,00
600	25,4	40,0	4,0	10,0	42	AS22 60040	471,00
700	25,4	40,0	4,6	10,0	45	AS22 70046	535,00
800	25,4	40,0	4,8	10,0	52	AS22 80048	619,00



AS25 Asphalt Standard - Laser-welded

LASER *

- With deep segments for undercut protection and 12 mm Segment height
- For powerful Floor Saws from 20 kW
- Asphalt, lime floor, abrasive material

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
500	35,0	40,0	3,6	12,0	32	AS25 50036	530,00
600	35,0	40,0	4,6	12,0	42	AS25 60046	736,00
700	35,0	40,0	4,6	12,0	46	AS25 70046	929,00
800	35,0	40,0	4,6	12,0	52	AS25 80046	1.131,00
1000	35,0	40,0	4,6	12,0	68	AS25 100046	1.584,00

**FOR
CUTT OFF
SAWS**




USER RECOMMENDATION



	LB 20	LT 30	LT 35	LT 40	Galaxis-B	SG 35	RX1	LBA60	LCA 65	Allmix	DA 60	LA 75	Stardust	Stardust Stahl	TS 35	TS 40GX	TP 35
General purpose	well suitable	well suitable	well suitable	well suitable		well suitable	well suitable										
Asphalt							limited suitable	well suitable	well suitable	well suitable	well suitable	well suitable					
Basalt						well suitable							limited suitable				
Beton	well suitable	well suitable	well suitable	well suitable	well suitable	well suitable	well suitable	well suitable	well suitable	well suitable			well suitable		well suitable	well suitable	well suitable
Abrasive concrete					limited suitable						well suitable	well suitable					
Reinforced concrete	well suitable	limited suitable	limited suitable	well suitable	well suitable	well suitable	well suitable						limited suitable		well suitable	well suitable	well suitable
Concrete products				well suitable					well suitable	well suitable							
Concrete and hard components																	
Roofing tile		limited suitable	limited suitable	well suitable													
Lime floor								well suitable			well suitable	well suitable					
Fireproof stone						limited suitable											
Fresh concrete								limited suitable				well suitable					
Granite		limited suitable	limited suitable		limited suitable	well suitable	well suitable						limited suitable		limited suitable	limited suitable	
Cast iron												well suitable	well suitable				
Wood												well suitable	well suitable				
Limestone						well suitable											
Sand-lime brick highly compressed						well suitable											
Hard clincers / bricks				limited suitable	limited suitable	well suitable	well suitable								limited suitable	limited suitable	
Medium hard clincers / bricks		well suitable	well suitable	well suitable	well suitable	well suitable	well suitable					limited suitable			well suitable	well suitable	
Soft clincers / bricks				limited suitable	limited suitable	well suitable	well suitable					well suitable					
Marble						well suitable											
Brickwork									well suitable	well suitable			well suitable		well suitable	well suitable	well suitable
Poroton																	
Porphyry		limited suitable	limited suitable			well suitable											
PVC												well suitable	well suitable				
Quartzite						well suitable											
Sandstein	limited suitable						well suitable					well suitable					
Fire clay						limited suitable											
Slate		limited suitable	limited suitable	limited suitable													
Steel													well suitable	well suitable			
Stoneware				limited suitable													
Exposed aggregate concrete		well suitable	well suitable	well suitable	well suitable	well suitable	well suitable								well suitable	well suitable	
Page	38	39	39	39	40	40	40	41	41	41	42	42	43	43	44	44	44

well suitable
 limited suitable



LB20 Concrete Standard - Laser-welded LASER

- 10 mm Segment height
- Universal Blade with good price-performance ratio
- Concrete, reinforced concrete - universal

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	3,2	10,0	20	LB20 300	56,00
300	25,4	40,0	3,2	10,0	20	LB20 301	56,00
350	20,0	40,0	3,2	10,0	24	LB20 350	65,00
350	25,4	40,0	3,2	10,0	24	LB20 351	65,00
400	20,0	40,0	3,6	10,0	28	LB20 400	94,00
400	25,4	40,0	3,6	10,0	28	LB20 401	94,00

DIAMOND BLADES

CUT OFF SAWS | DRY & WET CUTTING

For Gas Cut Off Saws and Hand-Held Saws




LT30 Concrete - Laser-welded

LASER *

- 10 mm Turbo-Segment
- excellent cutting speed
- Concrete, reinforced concrete, bricks, middle hard clinkers, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	3,2	10,0	20	LT30 300	73,00
300	25,4	40,0	3,2	10,0	20	LT30 301	73,00
350	20,0	40,0	3,2	10,0	24	LT30 350	88,00
350	25,4	40,0	3,2	10,0	24	LT30 351	88,00
400	20,0	40,0	3,6	10,0	28	LT30 400	129,00
400	25,4/20,0	40,0	3,6	10,0	28	LT30 405	129,00

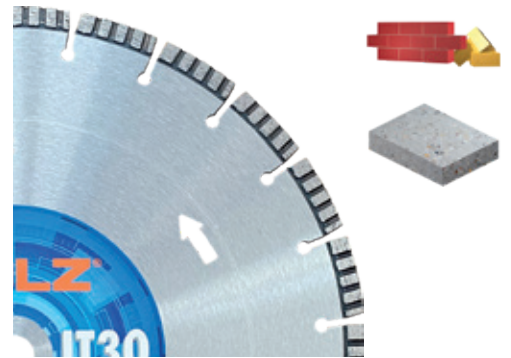


LT35 Concrete - Laser-welded

LASER *

- 16 mm Turbo-Segment
- excellent cutting performance
- Concrete, reinforced concrete, bricks, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	3,2	16,0	20	LT35 300	95,00
300	25,4	40,0	3,2	16,0	20	LT35 301	95,00
350	20,0	40,0	3,2	16,0	23	LT35 350	118,00
350	25,4	40,0	3,2	16,0	23	LT35 351	118,00
400	20,0	40,0	3,6	16,0	27	LT35 400	136,00
400	25,4/20,0	40,0	3,6	16,0	27	LT35 405	136,00

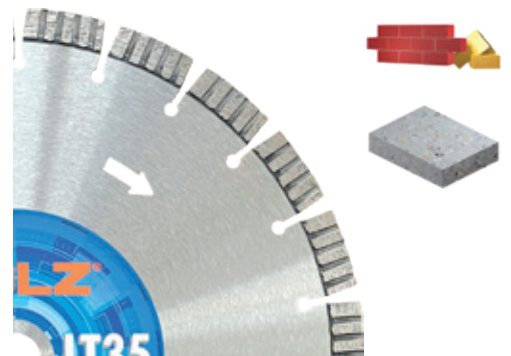


LT40 Concrete Premium - Laser-welded

LASER *

- 10 mm Turbo-Segment
- Powerful Diamond Blade with good life time
- Concrete, reinforced concrete, bricks, exposed aggregate concrete, clinkers, stones, general purpose


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	3,2	10,0	20	LT40 300	101,00
300	25,4	40,0	3,2	10,0	20	LT40 301	101,00
350	20,0	40,0	3,2	10,0	24	LT40 350	127,00
350	25,4	40,0	3,2	10,0	24	LT40 351	127,00
400	20,0	40,0	3,6	10,0	28	LT40 400	157,00
400	25,4	40,0	3,6	10,0	28	LT40 401	157,00
400	25,4/20,0	40,0	3,6	10,0	28	LT40 405	157,00

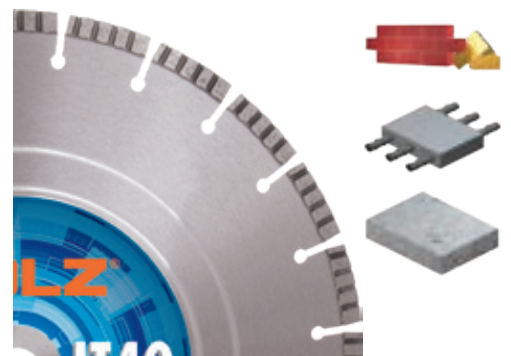

DIAMOND BLADES

CUT OFF SAW | DRY & WET CUTTING

Special Application

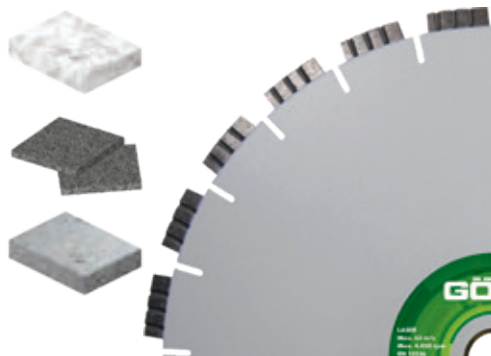

Galaxis-B Concrete Premium - Laser-welded

- Diamond patterned technology
- 15mm high segments
- Dry- and wet-cutting
- Best cutting performance on power cutter
- Concrete, exposed aggregate concrete, clinker, general purpose

LASER *

GALAXIS TECHNOLOGY

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	37,0	3,2	15	20	GXB 300	124,00
300	25,4	37,0	3,2	15	20	GXB 301	124,00
350	20,0	37,0	3,2	15	24	GXB 350	153,00
350	25,4	37,0	3,2	15	24	GXB 351	153,00
400	20,0	37,0	3,6	15	28	GXB 400	192,00
400	25,4	37,0	3,6	15	28	GXB 401	192,00

SG35 Granite Turbo - Laser-welded

- Narrow toothed - silent design
- Granite, hard stone, natural and cast stone, stone, hard clinkers

LASER *

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	31,0	2,8	10,0	20	0396 327 0302	121,00
300	25,4	31,0	2,8	10,0	20	0396 327 0301	121,00
350	20,0	31,0	2,8	10,0	24	0396 327 0352	148,00
350	25,4	31,0	2,8	10,0	24	0396 327 0351	148,00
400	20,0	31,0	3,2	10,0	30	0396 327 0402	202,00
400	25,4	31,0	3,2	10,0	30	0396 327 0401	202,00

RX1 Allround - Laser-welded

- 16 mm high Segments
- Wet cutting
- General purpose, concrete, bricks, exposed aggregate concrete, stone and granite

LASER *

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	20,0	40,0	3,4	16,0	24	RX1 350	151,00
350	25,4	40,0	3,4	16,0	24	RX1 351	151,00
400	20,0	40,0	3,4	16,0	28	RX1 400	169,00
400	25,4	40,0	3,4	16,0	28	RX1 401	169,00

DIAMOND BLADES

CUT OFF SAW | DRY & WET CUTTING


Allround Diamond blades for Concrete and Asphalt. Latest mixed-segmen arrangement!



LBA60 Allround Standard - laser welded **LASER** *

- 10 mm turbo segment
- fast cutting, good compromise between concrete and asphalt
- Concrete, asphalt and abrasive materials


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	2,8	10,0	20	LBA60 300	77,00
350	20,0	40,0	2,8	10,0	24	LBA60 350	91,00
350	25,4	40,0	2,8	10,0	24	LBA60 351	91,00

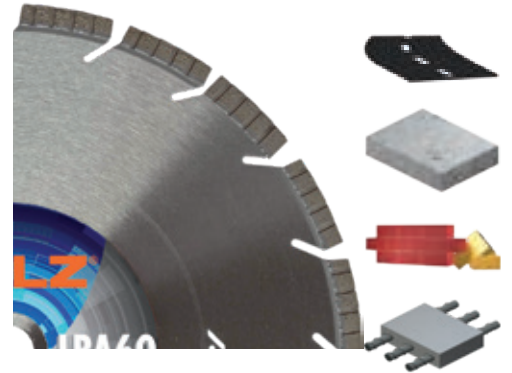

LCA 65 Allround Concrete & Asphalt **LASER** *

- Segment height 10 mm
- Laser-welded
- Turbo/Block Segments for abrasive to hard Material
- Turbosegment for optimised cooling
- Excellent cutting speed with good life
- Concrete, asphalt, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	3,2	10,0	20	LCA65 300	89,00
300	25,4	40,0	3,2	10,0	20	LCA65 301	89,00
350	20,0	40,0	3,2	10,0	24	LCA65 350	106,00
350	25,4	40,0	3,2	10,0	24	LCA65 351	106,00
400	20,0	40,0	3,6	10,0	28	LCA65 400	133,00
400	25,4	40,0	3,6	10,0	28	LCA65 401	133,00

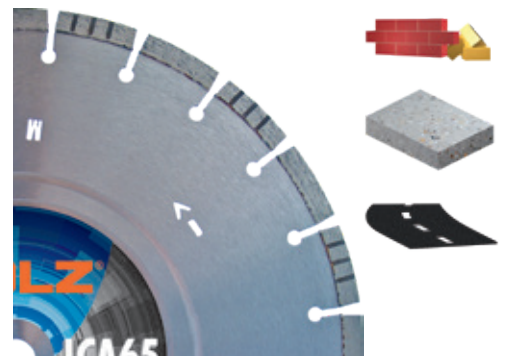

Allmix Mix - Laser-welded

- 10 mm segment height
- Dry- and wet-cutting
- Turbo/Block Segments for abrasive to hard materials
- Excellent life and fast cutting
- Concrete, asphalt and brickwork

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	3,2	10,0	20	0497 870 0300	112,00
300	25,4	40,0	3,2	10,0	20	0497 870 0301	112,00
350	20,0	40,0	3,2	10,0	24	0497 870 0350	130,00
350	25,4	40,0	3,2	10,0	24	0497 870 0351	130,00
400	20,0	40,0	3,6	10,0	28	0497 870 0400	173,00
400	25,4	40,0	3,6	10,0	28	0497 870 0401	173,00



DIAMOND BLADES

CUT OFF SAW | DRY & WET CUTTING

Hard Bond for abrasive material. Standard Diamond Blade for Asphalt



DA 60 Standard - Laser-welded

LASER *

- 10 mm Segment height
- Application: Asphalt, lime floor, medium hard clinker, general purpose

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	2,8	10,0	20	DA60 10 300	68,00
300	25,4	40,0	2,8	10,0	20	DA60 10 301	68,00
350	20,0	40,0	2,8	10,0	24	DA60 10 350	83,00
350	25,4	40,0	2,8	10,0	24	DA60 10 351	83,00
400	20,0	40,0	3,2	10,0	28	DA60 10 400	109,00
400	25,4/20,0	40,0	3,2	10,0	28	DA60 10 405	109,00



LA75 Premium - Laser-welded

LASER *

- Segment height 10 mm
- Good Life
- With deep segments for undercut protection
- Asphalt, lime floor, abrasive material

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
300	20,0	40,0	2,8	10,0	18	LA75 300	93,00
300	25,4	40,0	2,8	10,0	18	LA75 301	93,00
350	20,0	40,0	2,8	10,0	21	LA75 350	102,00
350	25,4	40,0	2,8	10,0	21	LA75 351	102,00
400	20,0	40,0	3,2	10,0	24	LA75 400	138,00
400	25,4	40,0	3,2	10,0	24	LA75 401	138,00

DIAMOND BLADES

CUT OFF SAW | DRY CUTTING

High-speed universal diamond cutting blades, electroplated



Stardust Premium Grip Technology


- Up to 30 % faster than conventional Diamond Blades
- Superior cutting speed in nearly all materials
- No blade change necessary
- No cutting problems with slow and polished tools
- double the number of Diamonds
- Concrete, steel, stone, cast iron, PVC, wood



Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		L	W		
300	20,0	3,4	3,0	0396 802 0300	126,00
350	20,0	3,4	3,0	0396 802 0350	152,00
350	25,4	3,4	3,0	0396 802 0351	152,00
400	20,0	3,6	3,0	0396 802 0400	199,00
400	25,4	3,6	3,0	0396 802 0401	199,00

Stardust Steel Premium Grip Technology

- Up to 30 % faster than conventional Diamond Blades
- Superior cutting speed in steel
- No cutting problems with slow and polished tools

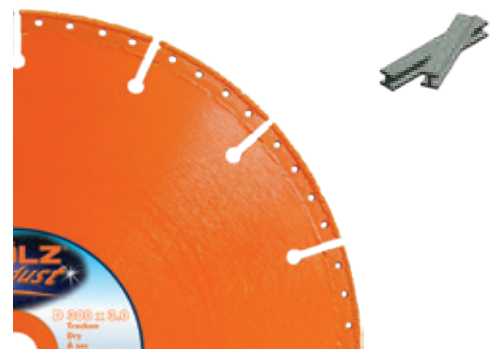


Ø (mm)	Bore (mm)	Segments (mm)		Order number	Price €
		L	W		
300	20,0	3,9	3,0	0497 804 0300	149,00
350	20,0	3,9	3,0	0497 804 0350	169,00

DIAMOND BLADES

CUT OFF SAW | DRY & WET CUTTING

For Hand-Held Electric Saws

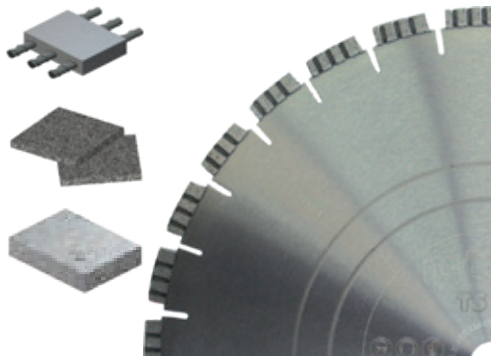


TS35 Concrete - Laser-welded

LASER *

- Turbo fast cutting blade for Squatina 400, GÖLZ HS350 and HS400
- Concrete, reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
350	20,0/25,4	31,0	2,4	10,0	24	0497 807 0350	145,00
400	25,4	31,0	2,4	10,0	30	0497 807 0401	181,00
400	25,4	31,0	2,4	10,0	30	0497 807 0403*	181,00

* with Flush hole 60 mm, 6xM6 for GÖLZ HS400 and Squatina 400

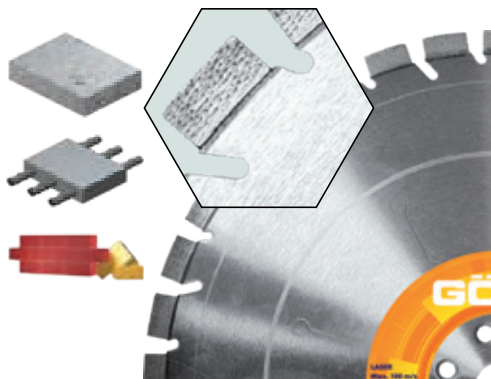


TS40GX Beton - Lasergeschweißt

LASER *
GALAXIS TECHNOLOGY

- Turbo fast cutting blade for Squatina 400, GÖLZ HS350 and HS400
- Precise diamond arrangement
- Concrete, reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
267	25,4	25,0	2,4	12,0	24	TS40GX 267	77,00
300	25,4	25,0	2,4	12,0	28	TS40GX 300	107,00
350	20,0/25,4	25,0	2,4	12,0	32	TS40GX 350	132,00
400	25,4	25,0	2,4	12,0	36	TS40GX 400	168,00
400	25,4	25,0	2,4	12,0	36	TS40GX 401*	168,00

* with Flush hole for GÖLZ HS400 and Squatina 400

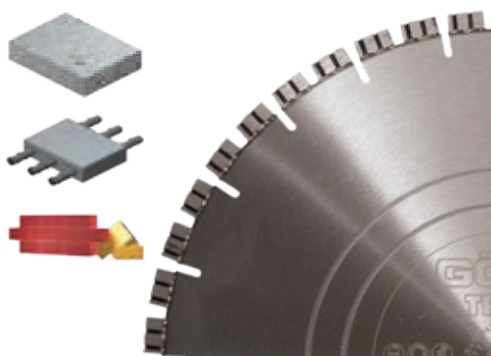

TP35 Concrete - Laser-welded

LASER *

- Turbo pre-cut blade for hand-held power cutters (pre-cut for ring-saw)
- Concrete, reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
400	20,0/25,4	20,0	4,5	10,0	46	0497 808 0400	202,00

DIAMOND RINGS

RING SAW | DRY & WET CUTTING


For Hand-Held Ring Saw



DR20/50/80

- Diamond cutting ring for ring saw

Typ	Color	Description	Order number	Price €
DR20	Gelb	Concrete, Reinforced Concrete	0396 890 0020	198,00
DR50	Blau	Concrete, Reinforced Concrete	0396 890 0050	198,00
DR80	Rot	Brickwork, Aerated Concrete	0396 890 0080	198,00

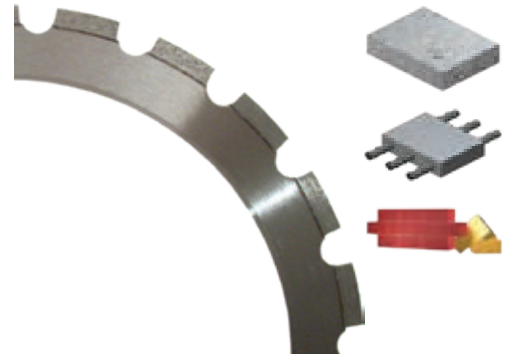

GX-DR400

GALAXIS
TECHNOLOGY

- Diamond ring with systematic diamond arrangement
- for High-frequency Saw Kogia
- incl. 2 x Drive wheel and fixing screws
- Concrete, reinforced concrete


Ø (mm)	Segments (mm)				Order number	Price €
	L	W	H	Qty		
400	33,0	4,0	10,0	26	0497 890 0020	349,00



DIAMOND BLADES

WALL SAWS | HEAVY USER

High-performance fast cutting blade for Wall Saws from 10 kW in Concrete

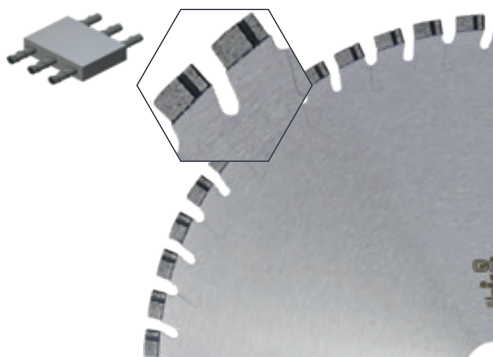


WS3-24

Concrete, Reinforced Concrete – Laser-welded

- For wall saws from 10 kW
- Segment height 12 mm
- optimized for concrete with medium reinforcement

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	24	5,0	12,0	54	0396 530 0601	295,00
700	60	24	5,0	12,0	60	0396 530 0701	432,00
800	60	24	4,4	12,0	70	0396 530 0800	488,00
800	60	24	5,0	12,0	70	0396 530 0801	508,00
1000	60	24	4,4	12,0	90	0396 530 1000	815,00
1200	60	24	4,4	12,0	106	0396 530 1200	1.090,00

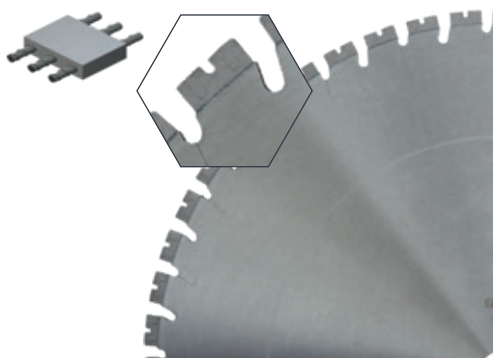


WS10 Highspeed wall saw blade

LASER *

- For wall saws from 20 kW and more
- Segment height 14 mm
- New 3-step-segment for effective and fast cutting
- Reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	35,0	4,8	14	40	WS10 60048	349,00
625	60	35,0	4,8	14	42	WS10 62548	372,00
800	60	35,0	4,8	14	52	WS10 80048	558,00
825	60	35,0	4,8	14	54	WS10 82548	638,00
1000	60	35,0	4,4	14	66	WS10 100044	878,00

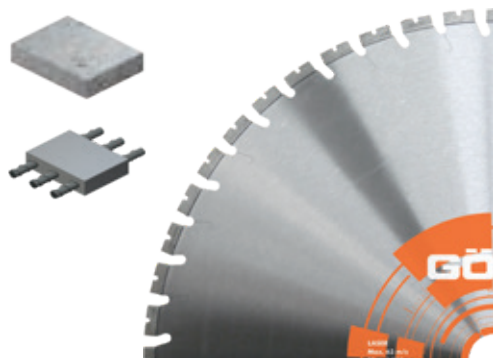

WS15GX

Concrete, Reinforced Concrete - Laser-welded

LASER *

GALAXIS TECHNOLOGY

- For Wall Saws from 15 kW
- Segment height 14 mm
- Reinforced concrete

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	35	4,8	14	40	WS15GX 60048	385,00
625	60	35	4,8	14	42	WS15GX 62548	423,00
650	60	35	4,8	14	44	WS15GX 65048	462,00
700	60	35	4,8	14	46	WS15GX 70048	558,00
800	60	35	4,8	14	52	WS15GX 80048	680,00
825	60	35	4,8	14	54	WS15GX 82548	737,00
900	60	35	4,8	14	54	WS15GX 90048	790,00
1000	60	35	4,4	14	66	WS15GX 100044	887,00
1200	60	35	4,4	14	80	WS15GX 120044	1.347,00


DIAMOND BLADES

WALL SAWS | HEAVY USER

WS1524GX

Concrete, Reinforced Concrete - Laser-welded

- 14 mm Segment height
- with systematical diamond arrangement
- For Wall Saws from 10 kW up to 20 kW

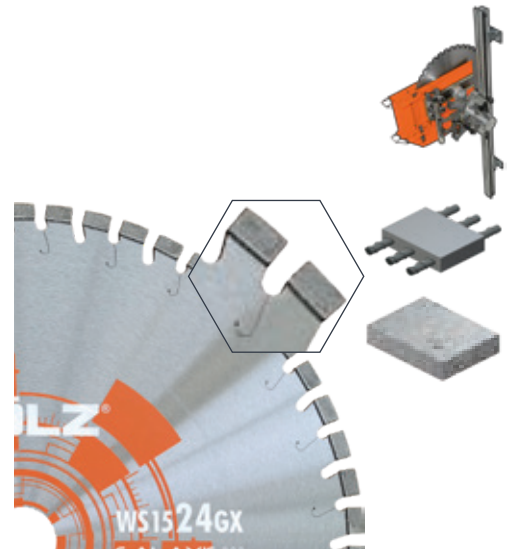


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	24	4,8	14	54	WS1524GX60048	385,00
625	60	24	4,8	14	56	WS1524GX62548	423,00
650	60	24	4,8	14	58	WS1524GX65048	462,00
800	60	24	4,4	14	72	WS1524GX80044	662,00
800	60	24	4,8	14	72	WS1524GX80048	680,00
825	60	24	4,8	14	74	WS1524GX82548	737,00
1000	60	24	4,4	14	90	WS1524GX100044	887,00
1200	60	24	4,4	14	108	WS1524GX120044	1.347,00

WS1524GXW


Noise-reduced-version

- 14 mm Segment height
- with systematical diamond arrangement
- For Wall Saws from 10 kW up to 20 kW

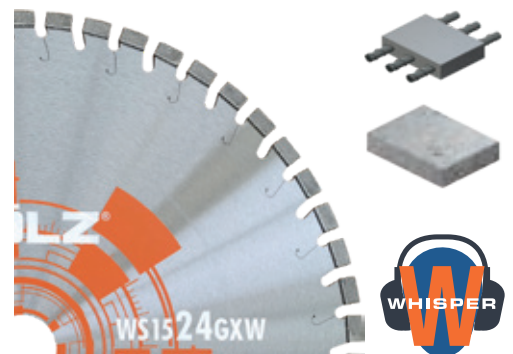

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	24	4,8	14	40	WS1524GXW60048	530,00
800	60	24	4,8	14	52	WS1524GXW80048	1.110,00
800	60	24	4,4	14	52	WS1524GXW80044	1.110,00
1000	60	24	4,4	14	66	WS1524GXW100044	1.685,00

DIAMOND BLADES

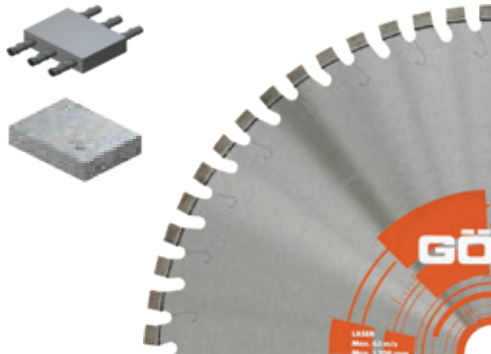

WS1520GX


LASER * **GALAXIS** TECHNOLOGY

Concrete, Reinforced Concrete - Laser-welded

- 14 mm Segment height
- with systematical diamond arrangement
- For Wall Saws from 10 kW up to 15 kW and Machines >15 kW with a high proportion of reinforcement

SUITABLE
FOR
E-FS

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	20	4,4	14	54	WS1520GX 60044	365,00
600	60	20	4,8	14	54	WS1520GX 60048	375,00
650	60	20	4,8	14	58	WS1520GX 65048	445,00
700	60	20	4,4	14	62	WS1520GX 70044	540,00
800	60	20	4,4	14	72	WS1520GX 80044	630,00
800	60	20	4,8	14	72	WS1520GX 80048	655,00
825	60	20	4,8	14	74	WS1520GX 80048	710,00
1000	60	20	4,4	14	90	WS1520GX 100044	890,00
1000	60	20	4,8	14	90	WS1520GX 100048	910,00
1200	60	20	4,4	14	108	WS1520GX 120044	1.325,00
1200	60	20	4,8	14	108	WS1520GX 120048	1.355,00

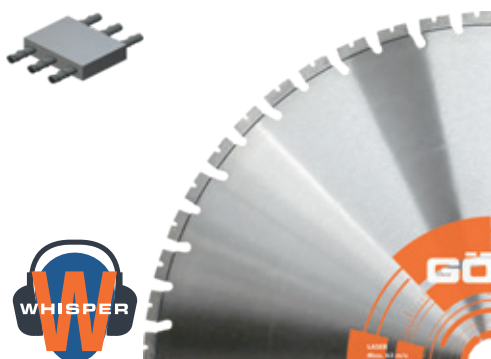

WS15GXW

Noise-reduced-version

LASER * **GALAXIS** TECHNOLOGY

- Wall Saw Blade with systematical diamond arrangement
- For Wall Saws from 10 kW up to 15 kW
- Concrete, reinforced Concrete


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	W	H	Qty		
600	60	24,0	4,8	14,0	54	WS15GXW 60048	522,00
800	60	24,0	4,8	14,0	72	WS15GXW 80048	1.060,00
1000	60	24,0	4,4	14,0	90	WS15GXW 100044	1.643,00

A close-up, high-angle photograph of several diamond blades arranged in a circular pattern. The blades are light-colored, possibly aluminum or steel, and feature a series of dark, rectangular segments along their edges, which are the diamond-tipped cutting edges. The segments are mounted on a dark, textured background. The blades are positioned in a way that creates a sense of depth and repetition, with some blades in the foreground and others receding into the background. The lighting is bright, highlighting the metallic surfaces and the texture of the diamond segments.

**DIAMOND
BLADES
ACCESSORIES**

ACCESSORIES

REDUCING RINGS

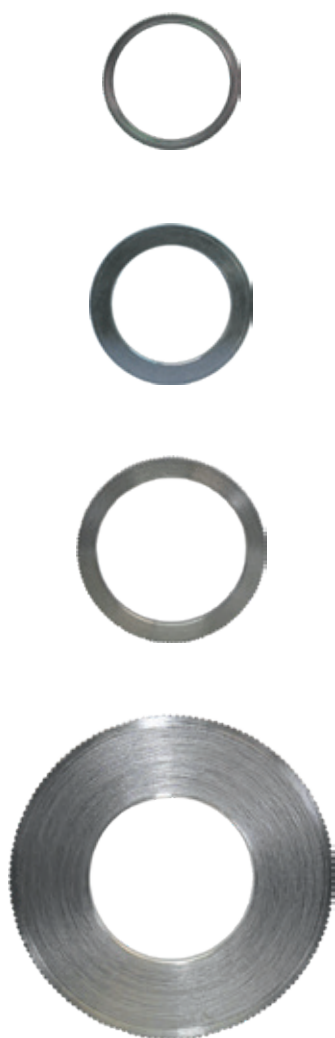

Outer Ø (mm)	Inner Ø (mm)	Width (mm)	Order number	Price €
22,2	15	1,5	0296 310 0031	2,60
22,2	20	1,8	0296 310 0023	2,70
25,4	20	10 (STIHL)	0282 000 0002	3,90
25,4	16	1,8	0296 310 0027	2,60
25,4	20	1,8	0296 310 0024	3,60
25,4	20	2,2	0296 310 0000	2,60
25,4	20	2,5	0296 310 0001	2,60
25,4	20	2,8	0296 310 0002	4,20
25,4	22,2	1,8	0296 310 0025	2,60
25,4	22,2	2,5	0296 310 0003	2,60
25,4	22,2	2,8	0296 310 0004	4,20
30,0	25,4	1,6	0296 310 0038	2,60
30,0	25,4	1,8	0296 310 0029	2,60
30,0	25,4	2,2	0296 310 0033	2,60
30,0	25,4	2,5	0296 310 0005	2,60
30,0	25,4	2,8	0296 310 0006	2,60
30,0	25,4	3,5	0296 310 0007	2,60
30,0	15	1,2	0296 310 0032	2,60
30,0	20	1,8	0296 310 0030	2,60
30,0	22,2	1,2	0296 310 0035	2,60
30,0	22,2	1,8	0296 310 0077	2,60
30,0	25,4	1,2	0296 310 0034	2,60
35,0	25,4	2,5	0296 310 0008	3,80
35,0	25,4	2,8	0296 310 0009	3,80
35,0	25,4	3,5	0296 310 0010	4,80
50,0	25,4	2,8	0296 310 0022	5,00
50,0	25,4	3,5	0296 310 0011	5,20
50,0	30	3,5	0296 310 0013	5,20
50,0	35	2,8	0296 310 0028	5,20
50,0	35	3,4	0296 310 0015	5,20
60,0	25,4	2,8	0296 310 0021	7,00
60,0	25,4	3,5	0296 310 0012	7,00
60,0	30	3,5	0296 310 0014	7,00
60,0	35	2,8	0296 310 0037	6,00
60,0	35	3,5	0296 310 0016	6,00
60,0	50	2,8	0296 310 0036	6,00
60,0	50	3,5	0296 310 0017	6,00
60,0	55	3,5	0296 310 0018	6,00
80,0	50	3,5	0296 310 0019	21,00
80,0	60	3,5	0296 310 0020	21,00

ACCESSORIES

RECOMMENDATION CHART

for diamond blades

Surface speed recommendation chart
corresponding DIN EN 13236:2019

Ø (mm)	RPM at surface speed of:						
	35 m/Sec	40 m/Sec	45 m/Sec	50 m/Sec	63 m/Sec	80 m/Sec	100 m/Sec
115	5850	6650	7500	8350	10500	13300	16650
125	5350	6150	6900	7650	9650	12250	15300
150	4500	5100	5750	6400	8050	10200	12750
180	3750	4250	4800	5350	6700	8500	10650
200	3350	3850	4300	4800	6050	7650	9550
230	2950	3350	3750	4200	5250	6650	8350
250	2700	3100	3450	3850	4850	6150	7650
300	2250	2550	2870	3200	4050	5100	6400
350	1950	2200	2450	2750	3450	4400	5500
400	1700	1950	2150	2400	3050	3850	4800
450	1500	1700	1950	2150	2700	3400	4250
500	1350	1550	1750	1950	2450	3100	3850
600	1150	1300	1450	1600	2050	2550	3200
700	895	1050	1150	1300	1700	2050	2550
800	840	960	1075	1200	1550	1950	2400
900	750	850	955	1100	1350	1700	2150
1000	670	765	860	960	1250	1550	1950
1500	450	510	757	640	805	1050	1300
1800	375	425	475	535	670	850	1100

The surface speed of saw blades depends on the material to be cut.
The following surface speed can be recommended as follows:

Material to be cut	Granite		Marble, Artificial Stone, Ceramics	Concrete		Asphalt
	high quarz	low quarz		Concrete	reinforced	
recommended surface speed m/sec	25 - 30	40 - 50	40 - 50	30 - 50	30 - 40	45 - 60

If the required surface speed is higher than 60 m/sec,
the steel center of the blade has to be tensioned harder.



GRINDING AND POLISHING TOOLS

DIAMOND GRINDING DISCS

CG250-S Ninja-Soft

- Soft bond grinding plate for hard concrete


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	B	H	Qty		
250	19	40	10	10	12	0497 529 0255	298,00



CG250-M Medium

- Medium bond grinding plate for medium hard flooring
- Cured Concrete, Concrete, medium hard flooring


Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	B	H	Qty		
250	19	40	10	10	16	0497 520 0250	268,00

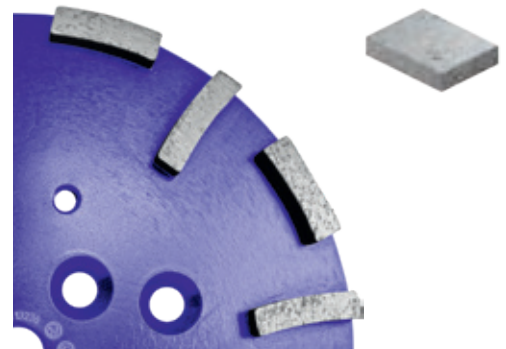

CG250-PKD PKD & Diamond


- 5 Segments and 10 x 1,4 PKD
- Asphalt, Lime floor, Abrasive material, Adhesives

Ø (mm)	Bore (mm)	Segments (mm)				Order number	Price €
		L	B	H	Qty		
250	19	40	10	4	5	0497 529 0254	498,00

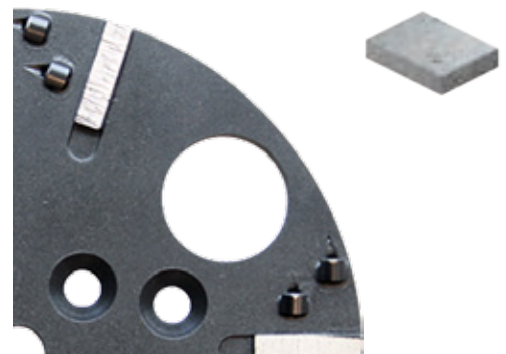


GRINDING TOOLS

EASY-SLIDE-SYSTEM




Diamond grinding tools for use in hard up to extremely soft concrete flooring. Made with medium bond and EASY-SLIDE-SYSTEM for fast and easy change of diamond tools on GÖLZ SM280 and SM400 grinding machines.

Type	Grit	Information	Order number	Price €	Color
GP 50	PKD	Aggressive grinding in Epoxi, Acryl, Gluten and Spatula	0497 530 0008	122,00	
GPD 80	PKD + D	PKD and diamond segment in Epoxi, Gluten an Spatula	0497 530 0009	129,00	
GM 20	16/18	Diamond segment medium bond, rough grit	0497 530 0003	60,00	
GM 30	30/40	rough grinding	0497 530 0004	50,00	
GM 60	60/80	medium grinding	0497 530 0005	50,00	
GM 100	100/120	finishing grinding	0497 530 0006	50,00	
GM 270	270/320	Diamond segment medium bond, small grit	0497 530 0007	50,00	

GRINDING TOOLS

CONCRETE POLISHING PADS

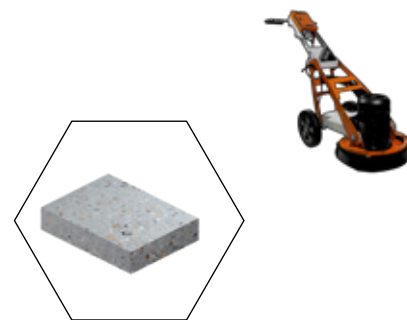

Polishing tools for surface preparation of concrete flooring.
Easy tool change by velcro device.
High quality diamonds for quick polishing and good life.
High gloss effect and clear surface.

Color	Grit	Ø x H (mm)	Order number	Price €
	50#	80 x 12	PPC50	30,00
	100#	80 x 12	PPC100	30,00
	200#	80 x 12	PPC200	30,00
	400#	80 x 12	PPC400	30,00
	800#	80 x 12	PPC800	30,00
	1500#	80 x 12	PPC1500	30,00
	3000#	80 x 12	PPC3000	30,00

Specification	Order number	Price €
Velcro ring Ø400 mm	VP400	76,00
Velcro ring Ø280 mm	VP280	46,00
Easy-Slide-Velcro for Velcro ring (pc.)	0284 700 0501	6,50




GRINDING TOOLS

POLISHING PADS

for surface treatment of concrete

Easy tool change by velcro device. High quality diamonds for quick polishing and good life. High gloss effect and clear surface on GÖLZ SM280 and SM400 grinding machines.

	Grit	Ø (mm)	Order number	Price €
	50#	280	PSP280-50	99,00
		400	PSP400-50	190,00
	100#	280	PSP280-100	99,00
		400	PSP400-100	190,00
	200#	280	PSP280-200	99,00
		400	PSP400-200	190,00
	400#	280	PSP280-400	99,00
		400	PSP400-400	190,00
	800#	280	PSP280-800	99,00
		400	PSP400-800	190,00
Ultras – for final cleaning and high gloss on concrete				
	1500#	280	PSP280U-1500	99,00
		400	PSP400U-1500	190,00



Specification	Order number	Price €
Velcro ring Ø400 mm	VP400	76,00
Velcro ring Ø280 mm	VP280	46,00
Easy-Slide-Velcro for Velcro ring fixing (pc.)	0284 700 0501	6,50

CORE DRILLING



DIAMOND DRY HOLLOW DRILLS

DRY DRILLING SYSTEM WITHOUT HAMMER |

WITH OR WITHOUT DUST EXTRACTION

Application: sockets -> electrical junction boxes



Dry Hollow Drills

- Connection M16

Typ	Ø (mm)	Length (mm)	#	Segment LxWxH (mm)	Order number	Price €	Information Application
DS 68	68	60	6	12 x 3,5 x 8	0296 414 0668	30,00	GREY Dry hollow drill , Standard
DS 82	82	60	8	12 x 3,5 x 8	0296 414 0682	35,00	
DB 10 S	68	60	6	12 x 3,5 x 8	0296 417 0668	44,00	short segment, very good cutting, steady drilling in high-compressed sandstone
DB 10 S	82	60	8	12 x 3,5 x 8	0296 417 0682	50,00	

Accessories			
Type machine	Adapter with centering drill	Order number	Price €
Standard	6-knt. / M 16	0296 516 0010	16,00
Hilti / Fein	SDS+ / M 16	0296 516 0030	19,50
Cardi / Bender / Weka	R 1/2" / M 16	0296 516 0011	39,00
Cardi T1800-82 / Götz	M 18 x 2,5 / M 16	0296 513 0040	45,00
Bosch	5/8" - 16G / M 16	0296 516 0013	45,00



DB 10SV Laser-welded Stand versia with sucking holes for use with dust collector

- Connection M16
- Limestone, aerated concrete and pumice stone

Dry hollow drills, 90 mm length, Connection M16

Typ	Ø (mm)	Length (mm)	Segment Quantity	Segment LxWxH (mm)	Order number	Price €
DB10SV	68	90	6	12,0 x 3,5 x 8,0	0296 415 0668	45,00
DB10SV	82	90	8	12,0 x 3,5 x 8,0	0296 415 0682	55,00



Accessories			
Description	Adapter	Order number	Price €
Dust rotor M 16	M 16	0296 513 1001	104,00
Dust rotor M 18	M 18	0296 513 1008	127,00
Center pin	for hollow drills	0296 513 1002	32,00
Adapter	M 16 / R 1/2"	0296 513 1003	23,00
Adapter	M 16 / M 18 x 2,5	0296 513 1006	23,00

DIAMOND DRY DRILLING SYSTEM

DIAMOND DRY DRILLING

KT 65 Dry Drill Bit for use with dust rotor for use with DRILLVAC

- Connection 1 1/4" UNC
- Cutting length 300 mm
- brickwork, sandstone, pumice stone, poroton and other abrasive material

Ø (mm)	Qty	Segment LxWxH (mm)	Length (mm)	Order number	Price €	Retipping €
31	3	16,0 x 3,0 x 10,0	300	D540 425 3031	73,00	38,00
41	3	16,0 x 3,0 x 10,0	300	D540 425 3041	73,00	38,00
51	3	16,0 x 3,0 x 10,0	300	D540 425 3051	74,00	38,00
56	4	16,0 x 3,0 x 10,0	300	D540 425 3056	83,00	48,00
61	4	24,0 x 3,5 x 10,0	300	D540 425 3061	89,00	48,00
68	4	24,0 x 3,5 x 10,0	300	D540 425 3068	125,00	48,00
72	4	24,0 x 3,5 x 10,0	300	D540 425 3072	100,00	48,00
82	4	24,0 x 3,5 x 10,0	300	D540 425 3082	98,00	48,00
101	5	24,0 x 3,5 x 10,0	300	D540 425 3101	114,00	58,00
111	5	24,0 x 3,5 x 10,0	300	D540 425 3111	122,00	58,00
121	5	24,0 x 4,0 x 10,0	300	D540 425 3121	138,00	60,00
131	5	24,0 x 4,0 x 10,0	300	D540 425 3131	167,00	60,00
138	5	24,0 x 4,0 x 10,0	300	D540 425 3138	150,00	60,00
141	5	24,0 x 4,0 x 10,0	300	D540 425 3141	163,00	60,00
151	6	24,0 x 4,0 x 10,0	300	D540 425 3151	163,00	70,00
161	6	24,0 x 4,0 x 10,0	300	D540 425 3161	177,00	70,00
171	6	24,0 x 4,0 x 10,0	300	D540 425 3171	177,00	70,00
181	6	24,0 x 4,0 x 10,0	300	D540 425 3181	179,00	70,00
201	6	24,0 x 4,0 x 10,0	300	D540 425 3201	216,00	70,00
275	11	24,0 x 4,5 x 10,0	300	D540 425 3275	381,00	91,00
305	12	24,0 x 4,5 x 10,0	300	D540 425 3305	517,00	103,00

Order key retipping: R 500 425 0 --- continue with digits for diameter

Core drill for dry drilling for stove fitters (for refractory stones and chamotte).

Ø (mm)	L	W	H	#	Order number	Price €
171	24	4,0	7	6	D540 425 2171	175,00
181	24	4,0	7	6	D540 425 2181	183,00
201	24	4,0	7	6	D540 425 2201	192,00
225	24	4,0	7	7	D540 425 2225	295,00
250	24	4,0	7	10	D540 425 2250	320,00
260	24	4,0	7	11	D540 425 2260	404,00

Dust Rotors - Center Drill - Accessories

Description	Order number	Price €
Dust Rotor DRILLVAC 1 1/4", machine connection R 1/2"	0296 513 0060	225,00
Dust Rotor DRILLVAC 1 1/4", machine connection 1 1/4"	0296 513 0065	225,00
Dust Rotor DRILLVAC 1 1/4", machine connection M 18x2,5	0296 513 0070	265,00
Center Drill 300 mm length	0296 513 0061	75,00
Center Drill 250 mm length	0296 513 0062	105,00
Slider - Quick release ring	0295 150 0112	106,00
Aluminum extension 1 1/4", 200 mm	0296 000 0036	75,00
Aluminum extension 1 1/4", 300 mm	0296 000 0037	96,00



GÖLZ recommend for dry drilling GÖLZ hand-held drills in connection with GÖLZ industrial vac.



For the drilling process GÖLZ recommends the use of center drill and quick release ring.



Dust Rotor with R 1/2" or 1 1/4" motor

DIAMOND DRY DRILLING SYSTEM

LASER *



KT45 Dry Drill Bit - Laserwelded

- Connection 1 1/4" UNC
- Brickwork, Limestone, Pumice, Bricks, Poroton, further abrasive Materials

Ø (mm)	Length (mm)	Segment (mm)				Order number	Price €
		L	B	H	#		
42	300	24	3,2	10	3	D640 445 3042	56,00
52	300	24	3,2	10	4	D640 445 3052	61,00
62	300	24	3,2	10	4	D640 445 3062	65,00
72	300	24	3,2	10	5	D640 445 3072	76,00
82	300	24	3,2	10	5	D640 445 3082	80,00
92	300	24	3,2	10	5	D640 445 3092	85,00
102	300	24	3,2	10	6	D640 445 3102	94,00
107	300	24	3,2	10	6	D640 445 3107	98,00
112	300	24	3,2	10	6	D640 445 3112	101,00
122	300	24	3,2	10	7	D640 445 3122	110,00
127	300	24	3,2	10	7	D640 445 3127	112,00
132	300	24	3,2	10	7	D640 445 3132	116,00
152	300	24	3,2	10	7	D640 445 3152	140,00
162	300	24	3,2	10	8	D640 445 3162	155,00
182	300	24	3,2	10	8	D640 445 3182	204,00
202	300	24	3,2	10	8	D640 445 3202	231,00

LASER *

GALAXIS TECHNOLOGY



KT55 Premium Dry Drill Bit - Laserwelded

- Connection 1 1/4" UNC
- Good cutting performance through pattern diamond technology
- Concrete, Brickwork, Limestone, Pumice, Bricks, Poroton

Ø (mm)	Length (mm)	Segment (mm)				Order number	Price €
		L	B	H	#		
42	300	16	3,4	10	4	D640 455 3042	109,00
52	300	20	3,4	10	5	D640 455 3052	112,00
56	300	20	3,4	10	5	D640 455 3056	127,00
62	300	20	3,4	10	5	D640 455 3062	130,00
68	300	20	3,4	10	5	D640 455 3068	134,00
72	300	20	3,4	10	6	D640 455 3072	142,00
82	300	20	3,4	10	6	D640 455 3082	145,00
92	300	20	3,4	10	6	D640 455 3092	151,00
102	300	20	3,4	10	7	D640 455 3102	160,00
107	300	20	3,4	10	7	D640 455 3107	163,00
112	300	20	3,4	10	7	D640 455 3112	163,00
122	300	20	3,4	10	8	D640 455 3122	178,00
127	300	20	3,4	10	8	D640 455 3127	186,00
132	300	20	4,0	10	8	D640 455 3132	198,00
142	300	20	4,0	10	8	D640 455 3142	284,00
152	300	20	4,0	10	8	D640 455 3152	301,00
162	300	20	4,0	10	9	D640 455 3162	331,00
172	300	20	4,0	10	9	D640 455 3172	332,00
182	300	20	4,0	10	9	D640 455 3182	333,00
202	300	20	4,0	10	10	D640 455 3202	420,00
212	300	20	4,0	10	10	D640 455 3212	497,00
225	300	20	4,0	10	11	D640 455 3225	580,00
250	300	20	4,0	10	11	D640 455 3250	645,00

DIAMOND DRILLS FOR TILES

ANGLE GRINDER | GALVANISED



Electroplated core bits that allow smooth coring through hardest porcelain, granite and stone plates, ceramics, tiles and marble.

Diameters 6-14 mm with integrated cooling wax, which enhances the cooling effect.

Max. Drilling depth: 45 mm
Connection: M14

Ø (mm)	Length (mm)	Order No.	Price €
6	45	DTD14-06	20,00
8	45	DTD14-08	25,00
10	45	DTD14-10	26,00
12	45	DTD14-12	27,00
14	45	DTD14-14	28,00
20	45	DTD14-20	28,00
25	45	DTD14-25	31,00
32	45	DTD14-32	35,00
35	45	DTD14-35	37,00
40	45	DTD14-40	42,00
50	45	DTD14-50	47,00
55	45	DTD14-55	49,00
60	45	DTD14-60	50,00
68	45	DTD14-68	57,00
82	45	DTD14-82	62,00
110	45	DTD14-110	97,00
120	45	DTD14-120	119,00



As a case set with 1 x Ø 20, 25, 32, 35, 40, 50, 60 and 68 mm each

Order number	Price €
DTD14-Set	315,00

R 1/2", DIAMOND CROWN DRILL BITS




RS75 Diamond Crown Bits Premium

- 7 mm segment height
- Concrete, reinforced concrete, brickwork

Ø (mm)	Length (mm)	Ringbreite (mm)	Order number	Price €
10	300	2,5	D520 501 3010	69,00
12	300	2,5	D520 501 3012	70,00
14	300	2,5	D520 501 3014	71,00
15	300	2,5	D520 501 3015	71,00
16	300	2,5	D520 501 3016	72,00
18	300	2,5	D520 501 3018	72,00
20	300	2,5	D520 501 3020	73,00
22	300	2,5	D520 501 3022	74,00
24	300	2,5	D520 501 3024	76,00
25	300	2,5	D520 501 3025	78,00
26	300	2,5	D520 501 3026	78,00
28	300	2,5	D520 501 3028	78,00
30	300	2,5	D520 501 3030	78,00
32	300	2,5	D520 501 3032	82,00
35	300	2,5	D520 501 3035	87,00
38	300	2,5	D520 501 3038	98,00
40	300	2,5	D520 501 3040	98,00
50	300	2,5	D520 501 3050	116,00

Other Diameters and lengths available on request!

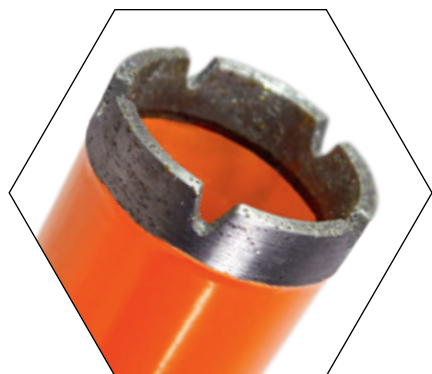

1 1/4" UNC, DIAMOND DRILL BITS

RM40 Premium Concrete

- 10 mm segment height / roof segment
- Concrete, reinforced concrete, brickwork

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit €	Re- tipping €
		L	B	H	#			
32	450	16	3,0	10	4	D540 450 4032	73,00	49,00
35	450	16	3,0	10	4	D540 450 4035	74,00	49,00
42	450	16	3,0	10	5	D540 450 4042	78,00	60,00
45	450	16	3,0	10	5	D540 450 4045	82,00	60,00
52	450	24	3,0	10	5	D540 450 4052	86,00	62,00
56	450	24	3,0	10	5	D540 450 4056	89,00	62,00
62	450	24	3,0	10	6	D540 450 4062	94,00	74,00
66	450	24	3,0	10	6	D540 450 4066	104,00	74,00
72	450	24	3,5	10	6	D540 450 4072	105,00	74,00
76	450	24	3,5	10	7	D540 450 4076	111,00	84,00
82	450	24	3,5	10	7	D540 450 4082	111,00	84,00
87	450	24	3,5	10	8	D540 450 4087	125,00	97,00
92	450	24	3,5	10	8	D540 450 4092	125,00	97,00
102	450	24	3,5	10	9	D540 450 4102	129,00	109,00
108	450	24	4,0	10	9	D540 450 4108	144,00	109,00
112	450	24	4,0	10	9	D540 450 4112	146,00	109,00
122	450	24	4,0	10	10	D540 450 4122	162,00	121,00
125	450	24	4,0	10	10	D540 450 4125	175,00	121,00
127	450	24	4,0	10	10	D540 450 4127	170,00	121,00
132	450	24	4,0	10	10	D540 450 4132	178,00	121,00
138	450	24	4,0	10	10	D540 450 4138	193,00	133,00
142	450	24	4,0	10	11	D540 450 4142	193,00	133,00
152	450	24	4,0	10	12	D540 450 4152	205,00	144,00
158	450	24	4,0	10	12	D540 450 4158	211,00	144,00
162	450	24	4,0	10	12	D540 450 4162	215,00	144,00
172	450	24	4,0	10	13	D540 450 4172	228,00	156,00
182	450	24	4,0	10	13	D540 450 4182	242,00	156,00
186	450	24	4,0	10	13	D540 450 4186	245,00	156,00
200	450	24	4,0	10	14	D540 450 4200	269,00	167,00
212	450	24	4,0	10	15	D540 450 4212	358,00	181,00
218	450	24	4,0	10	15	D540 450 4218	358,00	181,00
225	450	24	4,0	10	15	D540 450 4225	372,00	181,00
250	450	24	4,0	10	15	D540 450 4250	382,00	181,00
270	500	24	4,5	10	16	D540 450 5270	469,00	197,00
300	500	24	4,5	10	18	D540 450 5300	453,00	223,00
320	500	24	4,5	10	19	D540 450 5320	578,00	226,00
350	500	24	4,5	10	20	D540 450 5350	544,00	245,00
400	500	24	4,5	10	22	D540 450 5400	625,00	271,00

Order key retipping: R 500 450 0 --- continue with digits for diameter

Other Diameters and lengths available on request!



10 mm Roof segment



1 1/4" / M41, DIAMOND DRILL BITS



RM52 Premium Concrete

- 10 mm segment height / roof segment
- very hard concrete, reinforced concrete, brickwork

Ø (mm)	Length (mm)	Segment (mm)				Order key	Drill Bit €		Re- tip- ping €
		L	B	H	#		1 1/4" D540 —	M41 D543 —	
25	500	16	3,0	10	3	--- 540 5025	82,00	-	40,00
32	500	16	3,0	10	4	--- 540 5032	94,00	-	52,00
35	500	16	3,0	10	4	--- 540 5035	95,00	-	52,00
42	500	16	3,0	10	5	--- 540 5042	100,00	-	63,00
45	500	24	3,5	10	4	--- 540 5045	103,00	-	55,00
52	500	24	3,5	10	5	--- 540 5052	107,00	112,00	68,00
56	500	24	3,5	10	5	--- 540 5056	113,00	119,00	68,00
62	500	24	3,5	10	6	--- 540 5062	121,00	127,00	81,00
66	500	24	3,5	10	6	--- 540 5066	127,00	134,00	81,00
72	500	24	3,5	10	6	--- 540 5072	131,00	137,00	81,00
76	500	24	3,5	10	7	--- 540 5076	147,00	154,00	95,00
82	500	24	3,5	10	7	--- 540 5082	141,00	149,00	95,00
87	500	24	3,5	10	8	--- 540 5087	162,00	170,00	108,00
92	500	24	3,5	10	8	--- 540 5092	158,00	166,00	108,00
102	500	24	3,5	10	9	--- 540 5102	167,00	176,00	119,00
108	500	24	4,0	10	9	--- 540 5108	187,00	196,00	119,00
112	500	24	4,0	10	9	--- 540 5112	191,00	201,00	119,00
122	500	24	4,0	10	10	--- 540 5122	197,00	206,00	132,00
125	500	24	4,0	10	10	--- 540 5125	220,00	231,00	132,00
127	500	24	4,0	10	10	--- 540 5127	225,00	236,00	132,00
132	500	24	4,0	10	10	--- 540 5132	213,00	223,00	132,00
138	500	24	4,0	10	10	--- 540 5138	226,00	237,00	132,00
142	500	24	4,0	10	11	--- 540 5142	226,00	237,00	144,00
152	500	24	4,0	10	12	--- 540 5152	243,00	255,00	157,00
158	500	24	4,0	10	12	--- 540 5158	277,00	291,00	157,00
162	500	24	4,0	10	12	--- 540 5162	251,00	263,00	157,00
172	500	24	4,0	10	13	--- 540 5172	271,00	284,00	173,00
182	500	24	4,0	10	13	--- 540 5182	281,00	295,00	173,00
186	500	24	4,0	10	13	--- 540 5186	286,00	301,00	173,00
200	500	24	4,0	10	14	--- 540 5200	304,00	319,00	185,00
212	500	24	4,0	10	15	--- 540 5212	386,00	406,00	198,00
218	500	24	4,0	10	15	--- 540 5218	416,00	437,00	198,00
225	500	24	4,0	10	15	--- 540 5225	416,00	437,00	198,00
250	500	24	4,0	10	15	--- 540 5250	457,00	480,00	198,00
270	500	24	4,5	10	16	--- 540 5270	490,00	514,00	216,00
300	500	24	4,5	10	18	--- 540 5300	508,00	534,00	243,00
320	500	24	4,5	10	19	--- 540 5320	629,00	661,00	256,00
350	500	24	4,5	10	20	--- 540 5350	573,00	602,00	269,00
400	500	24	4,5	10	22	--- 540 5400	671,00	705,00	296,00

Order key retipping: R 500 540 0 --- continue with digits for diameter
Other Diameters and lengths available on request!

DIAMOND DRILL BITS, 4-HOLE FLANGE


RM52 Premium Concrete

- 10 mm segment height / roof segment
- very hard concrete, reinforced concrete, brickwork

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit €	Re- tipping €
		L	B	H	#			
450	450 ex. Flange	24	4,5	10	23	D542 540 4450	799,00	310,00
500	450 ex. Flange	24	4,5	10	25	D542 540 4500	966,00	336,00
600	450 ex. Flange	24	4,5	10	28	D542 540 4600	989,00	375,00
700	450 ex. Flange	24	5,5	10	30	D542 540 4700	1.286,00	425,00
800	450 ex. Flange	24	5,5	10	35	D542 540 4800	1.626,00	495,00
900	450 ex. Flange	24	5,5	10	40	D542 540 4900	1.882,00	566,00
1000	450 ex. Flange	24	5,5	10	45	D542 540 4910	2.122,00	635,00
1100	450 ex. Flange	24	5,5	10	50	D542 540 4911	2.724,00	705,00
1200	450 ex. Flange	24	5,5	10	55	D542 540 4912	3.161,00	777,00

Order key retipping: R 500 540 0 --- continue with digits for diameter

Other Diameters and lengths available on request!

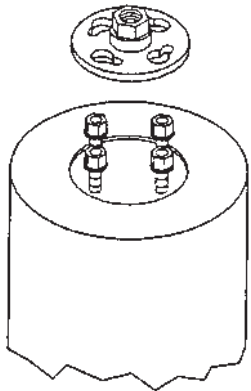

Order number Flange 0296 000 0111

Price: 55,00 €

1 1/4" UNC / M41, DIAMOND DRILL BITS

RM30 Premium Concrete

- Reinforced Concrete, strong reinforcement, granite, ductile cast iron pipes
- Order key: 1 1/4" = D540 310 ---; M41 = D543 310 ---

RM65 Premium Concrete

- High-end Segment, good drilling performance, long life
- Reinforced concrete, with abrasive aggregates
- Order key: 1 1/4" = D540 560 ---; M41 = D543 560---



Ø (mm)	Length (mm)	Segment (mm)				Order key	Drill Bit €		Re- tipping €
		L	B	H	#		1 1/4"	M41	
25	500	16	3,0	10	3	--- 5025	82,00	-	40,00
32	500	16	3,0	10	4	--- 5032	94,00	-	52,00
35	500	16	3,0	10	4	--- 5035	95,00	-	52,00
42	500	16	3,0	10	5	--- 5042	100,00	-	63,00
45	500	24	3,5	10	4	--- 5045	103,00	-	55,00
52	500	24	3,5	10	5	--- 5052	107,00	112,00	68,00
56	500	24	3,5	10	5	--- 5056	113,00	119,00	68,00
62	500	24	3,5	10	6	--- 5062	121,00	127,00	81,00
66	500	24	3,5	10	6	--- 5066	127,00	134,00	81,00
72	500	24	3,5	10	6	--- 5072	131,00	137,00	81,00
76	500	24	3,5	10	7	--- 5076	147,00	154,00	95,00
82	500	24	3,5	10	7	--- 5082	141,00	149,00	95,00
87	500	24	3,5	10	8	--- 5087	162,00	170,00	108,00
92	500	24	3,5	10	8	--- 5092	158,00	166,00	108,00
102	500	24	3,5	10	9	--- 5102	167,00	176,00	119,00
108	500	24	4,0	10	9	--- 5108	187,00	196,00	119,00
112	500	24	4,0	10	9	--- 5112	191,00	201,00	119,00
122	500	24	4,0	10	10	--- 5122	197,00	206,00	132,00
125	500	24	4,0	10	10	--- 5125	220,00	231,00	132,00
127	500	24	4,0	10	10	--- 5127	225,00	236,00	132,00
132	500	24	4,0	10	10	--- 5132	213,00	223,00	132,00
138	500	24	4,0	10	10	--- 5138	226,00	237,00	144,00
142	500	24	4,0	10	11	--- 5142	226,00	237,00	144,00
152	500	24	4,0	10	12	--- 5152	243,00	255,00	157,00
158	500	24	4,0	10	12	--- 5158	277,00	291,00	157,00
162	500	24	4,0	10	12	--- 5162	251,00	263,00	157,00
172	500	24	4,0	10	13	--- 5172	271,00	284,00	173,00
182	500	24	4,0	10	13	--- 5182	281,00	295,00	173,00
186	500	24	4,0	10	13	--- 5186	286,00	301,00	173,00
200	500	24	4,0	10	14	--- 5200	304,00	319,00	185,00
212	500	24	4,0	10	15	--- 5212	386,00	406,00	198,00
218	500	24	4,0	10	15	--- 5218	416,00	437,00	198,00
225	500	24	4,0	10	15	--- 5225	416,00	437,00	198,00
250	500	24	4,0	10	15	--- 5250	457,00	480,00	198,00
270	500	24	4,5	10	16	--- 5270	490,00	514,00	216,00
300	500	24	4,5	10	18	--- 5300	508,00	534,00	243,00
320	500	24	4,5	10	19	--- 5320	629,00	661,00	256,00
350	500	24	4,5	10	20	--- 5350	573,00	602,00	269,00
400	500	24	4,5	10	22	--- 5400	671,00	705,00	296,00

Order key retipping: R 500 310 0 --- continue with digits for diameter

Other Diameters and lengths available on request!

DIAMOND DRILL BITS, 4-HOLE FLANGE

RM30 Premium Concrete

- 10 mm segment height / roof segment
- Reinforced Concrete, strong reinforcement, granite, ductile cast iron pipes

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
450	450 ex. Flange	24	4,5	10	23	D542 310 4450	799,00	310,00
500	450 ex. Flange	24	4,5	10	25	D542 310 4500	966,00	336,00
600	450 ex. Flange	24	4,5	10	28	D542 310 4600	989,00	375,00
700	450 ex. Flange	24	5,5	10	30	D542 310 4700	1.286,00	425,00
800	450 ex. Flange	24	5,5	10	35	D542 310 4800	1.626,00	495,00
900	450 ex. Flange	24	5,5	10	40	D542 310 4900	1.882,00	566,00
1000	450 ex. Flange	24	5,5	10	45	D542 310 4910	2.122,00	635,00
1100	450 ex. Flange	24	5,5	10	50	D542 310 4911	2.724,00	705,00
1200	450 ex. Flange	24	5,5	10	55	D542 310 4912	3.161,00	777,00

Order key retipping: R 500 310 0 --- continue with digits for diameter

Other Diameters and lengths available on request!




RM65 Premium Beton

- High-end segment, good drilling performance, long life
- 10 mm segment height / roof segment
- Reinforced concrete

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
450	450 ex. Flange	24	4,5	10	23	D542 560 4450	799,00	310,00
500	450 ex. Flange	24	4,5	10	25	D542 560 4500	966,00	336,00
600	450 ex. Flange	24	4,5	10	28	D542 560 4600	989,00	375,00
700	450 ex. Flange	24	5,5	10	30	D542 560 4700	1.286,00	425,00
800	450 ex. Flange	24	5,5	10	35	D542 560 4800	1.626,00	495,00
900	450 ex. Flange	24	5,5	10	40	D542 560 4900	1.882,00	566,00
1000	450 ex. Flange	24	5,5	10	45	D542 560 4910	2.122,00	635,00
1100	450 ex. Flange	24	5,5	10	50	D542 560 4911	2.724,00	705,00
1200	450 ex. Flange	24	5,5	10	55	D542 560 4912	3.161,00	777,00

Order key retipping: R 500 560 0 --- continue with digits for diameter

Other Diameters and lengths available on request!



Order number Flange 0296 000 0111

Price: 55,00 €

1 1/4", DIAMOND DRILL BITS

RML60 Concrete Standard – Laser-welded



- Excellent performance with good life
- 12 mm segment height
- Concrete, reinforced concrete and brickwork

Ø (mm)	Qty	Segment L x W x H (mm)	Length (mm)	Order number	Price €
42	4	24 x 3,5 x 12	450	D640 640 4042	91,00
52	5	24 x 3,5 x 12	450	D640 640 4052	96,00
62	6	24 x 3,5 x 12	450	D640 640 4062	109,00
66	6	24 x 3,5 x 12	450	D640 640 4066	117,00
72	7	24 x 3,5 x 12	450	D640 640 4072	117,00
82	8	24 x 3,5 x 12	450	D640 640 4082	131,00
92	8	24 x 3,5 x 12	450	D640 640 4092	144,00
102	9	24 x 3,5 x 12	450	D640 640 4102	155,00
107	9	24 x 3,5 x 12	450	D640 640 4107	162,00
112	10	24 x 3,5 x 12	450	D640 640 4112	166,00
122	10	24 x 3,5 x 12	450	D640 640 4122	187,00
125	10	24 x 3,5 x 12	450	D640 640 4125	195,00
127	10	24 x 3,5 x 12	450	D640 640 4127	189,00
132	11	24 x 3,5 x 12	450	D640 640 4132	191,00
142	11	24 x 4,0 x 12	450	D640 640 4142	217,00
152	12	24 x 4,0 x 12	450	D640 640 4152	223,00
158	12	24 x 4,0 x 12	450	D640 640 4158	238,00
162	12	24 x 4,0 x 12	450	D640 640 4162	229,00
172	13	24 x 4,0 x 12	450	D640 640 4172	248,00
182	13	24 x 4,0 x 12	450	D640 640 4182	257,00
200	15	24 x 4,0 x 12	450	D640 640 4200	276,00
225	16	24 x 4,0 x 12	450	D640 640 4225	345,00
250	17	24 x 4,0 x 12	450	D640 640 4250	385,00



1 1/4" UNC / M41, DIAMOND DRILL BITS

RGX50 Premium Concrete

GALAXIS
TECHNOLOGY



- Good drilling performance through pattern diamond technology
- good life, for drill motors from 3 kW on
- 12 mm segment height / roof segment
- Concrete, reinforced concrete

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit €		Re- tip- ping €
		L	B	H	#		1 1/4" D540 —	M41 D543 —	
52	500	24	3,5	10+2	5	--- 570 5052	118,00	124,00	80,00
56	500	24	3,5	10+2	5	--- 570 5056	120,00	126,00	80,00
62	500	24	3,5	10+2	6	--- 570 5062	132,00	138,00	90,00
66	500	24	3,5	10+2	6	--- 570 5066	140,00	147,00	90,00
72	500	24	3,5	10+2	6	--- 570 5072	138,00	145,00	90,00
76	500	24	3,5	10+2	7	--- 570 5076	157,00	164,00	103,00
82	500	24	3,5	10+2	7	--- 570 5082	153,00	161,00	103,00
87	500	24	3,5	10+2	8	--- 570 5087	173,00	181,00	115,00
92	500	24	3,5	10+2	8	--- 570 5092	171,00	179,00	115,00
102	500	24	3,5	10+2	9	--- 570 5102	187,00	196,00	127,00
108	500	24	4,0	10+2	9	--- 570 5108	200,00	210,00	129,00
112	500	24	4,0	10+2	9	--- 570 5112	200,00	210,00	129,00
122	500	24	4,0	10+2	10	--- 570 5122	212,00	222,00	142,00
125	500	24	4,0	10+2	10	--- 570 5125	228,00	239,00	142,00
127	500	24	4,0	10+2	10	--- 570 5127	213,00	223,00	142,00
132	500	24	4,0	10+2	10	--- 570 5132	224,00	235,00	142,00
138	500	24	4,0	10+2	11	--- 570 5138	246,00	259,00	158,00
142	500	24	4,0	10+2	11	--- 570 5142	249,00	261,00	158,00
152	500	24	4,0	10+2	12	--- 570 5152	259,00	271,00	172,00
158	500	24	4,0	10+2	12	--- 570 5158	298,00	313,00	172,00
162	500	24	4,0	10+2	12	--- 570 5162	266,00	280,00	172,00
172	500	24	4,0	10+2	13	--- 570 5172	289,00	304,00	187,00
182	500	24	4,0	10+2	13	--- 570 5182	306,00	322,00	187,00
186	500	24	4,0	10+2	13	--- 570 5186	313,00	329,00	187,00
200	500	24	4,0	10+2	14	--- 570 5200	326,00	343,00	199,00
212	500	24	4,0	10+2	15	--- 570 5212	420,00	441,00	217,00
218	500	24	4,0	10+2	15	--- 570 5218	449,00	471,00	217,00
225	500	24	4,0	10+2	15	--- 570 5225	451,00	474,00	217,00
250	500	24	4,0	10+2	15	--- 570 5250	495,00	520,00	217,00
270	500	24	4,5	10+2	16	--- 570 5270	523,00	549,00	238,00
300	500	24	4,5	10+2	18	--- 570 5300	537,00	564,00	263,00
320	500	24	4,5	10+2	19	--- 570 5320	627,00	659,00	281,00
350	500	24	4,5	10+2	20	--- 570 5350	609,00	640,00	297,00
400	500	24	5,0	10+2	22	--- 570 5400	729,00	765,00	328,00

Order key retipping: R 500 570 0 --- continue with digits for diameter

Other Diameters and lengths available on request!



1 1/4" UNC, EXTENDABLE CORE DRILLING SYSTEM

- for motors from 3 kW power output on, depending on diameter and total length
- Various segment types available for concrete, reinforced concrete and masonry



Please request an actual daily quote!

System	With core catcher spring	Without core catcher spring
Standard diameters (mm)	55, 65, 75, 85, 100, 115, 130, 145, 170, 200, 250	45, 55, 65, 75, 85, 100, 125, 140, 150, 175, 200
Extensions (mm)	500, 750, 1000	
Other diameters and lengths	available on request!	


System with Core Catcher Spring:

The core catcher spring surrounds and clamps the drill core so that the core can be pulled out of the borehole together with the drill bit at the end of the drilling process.

Application areas: for long or deep blind holes.

System without Core Catcher Ring:

For through-hole drilling where the core does not need to be extracted.

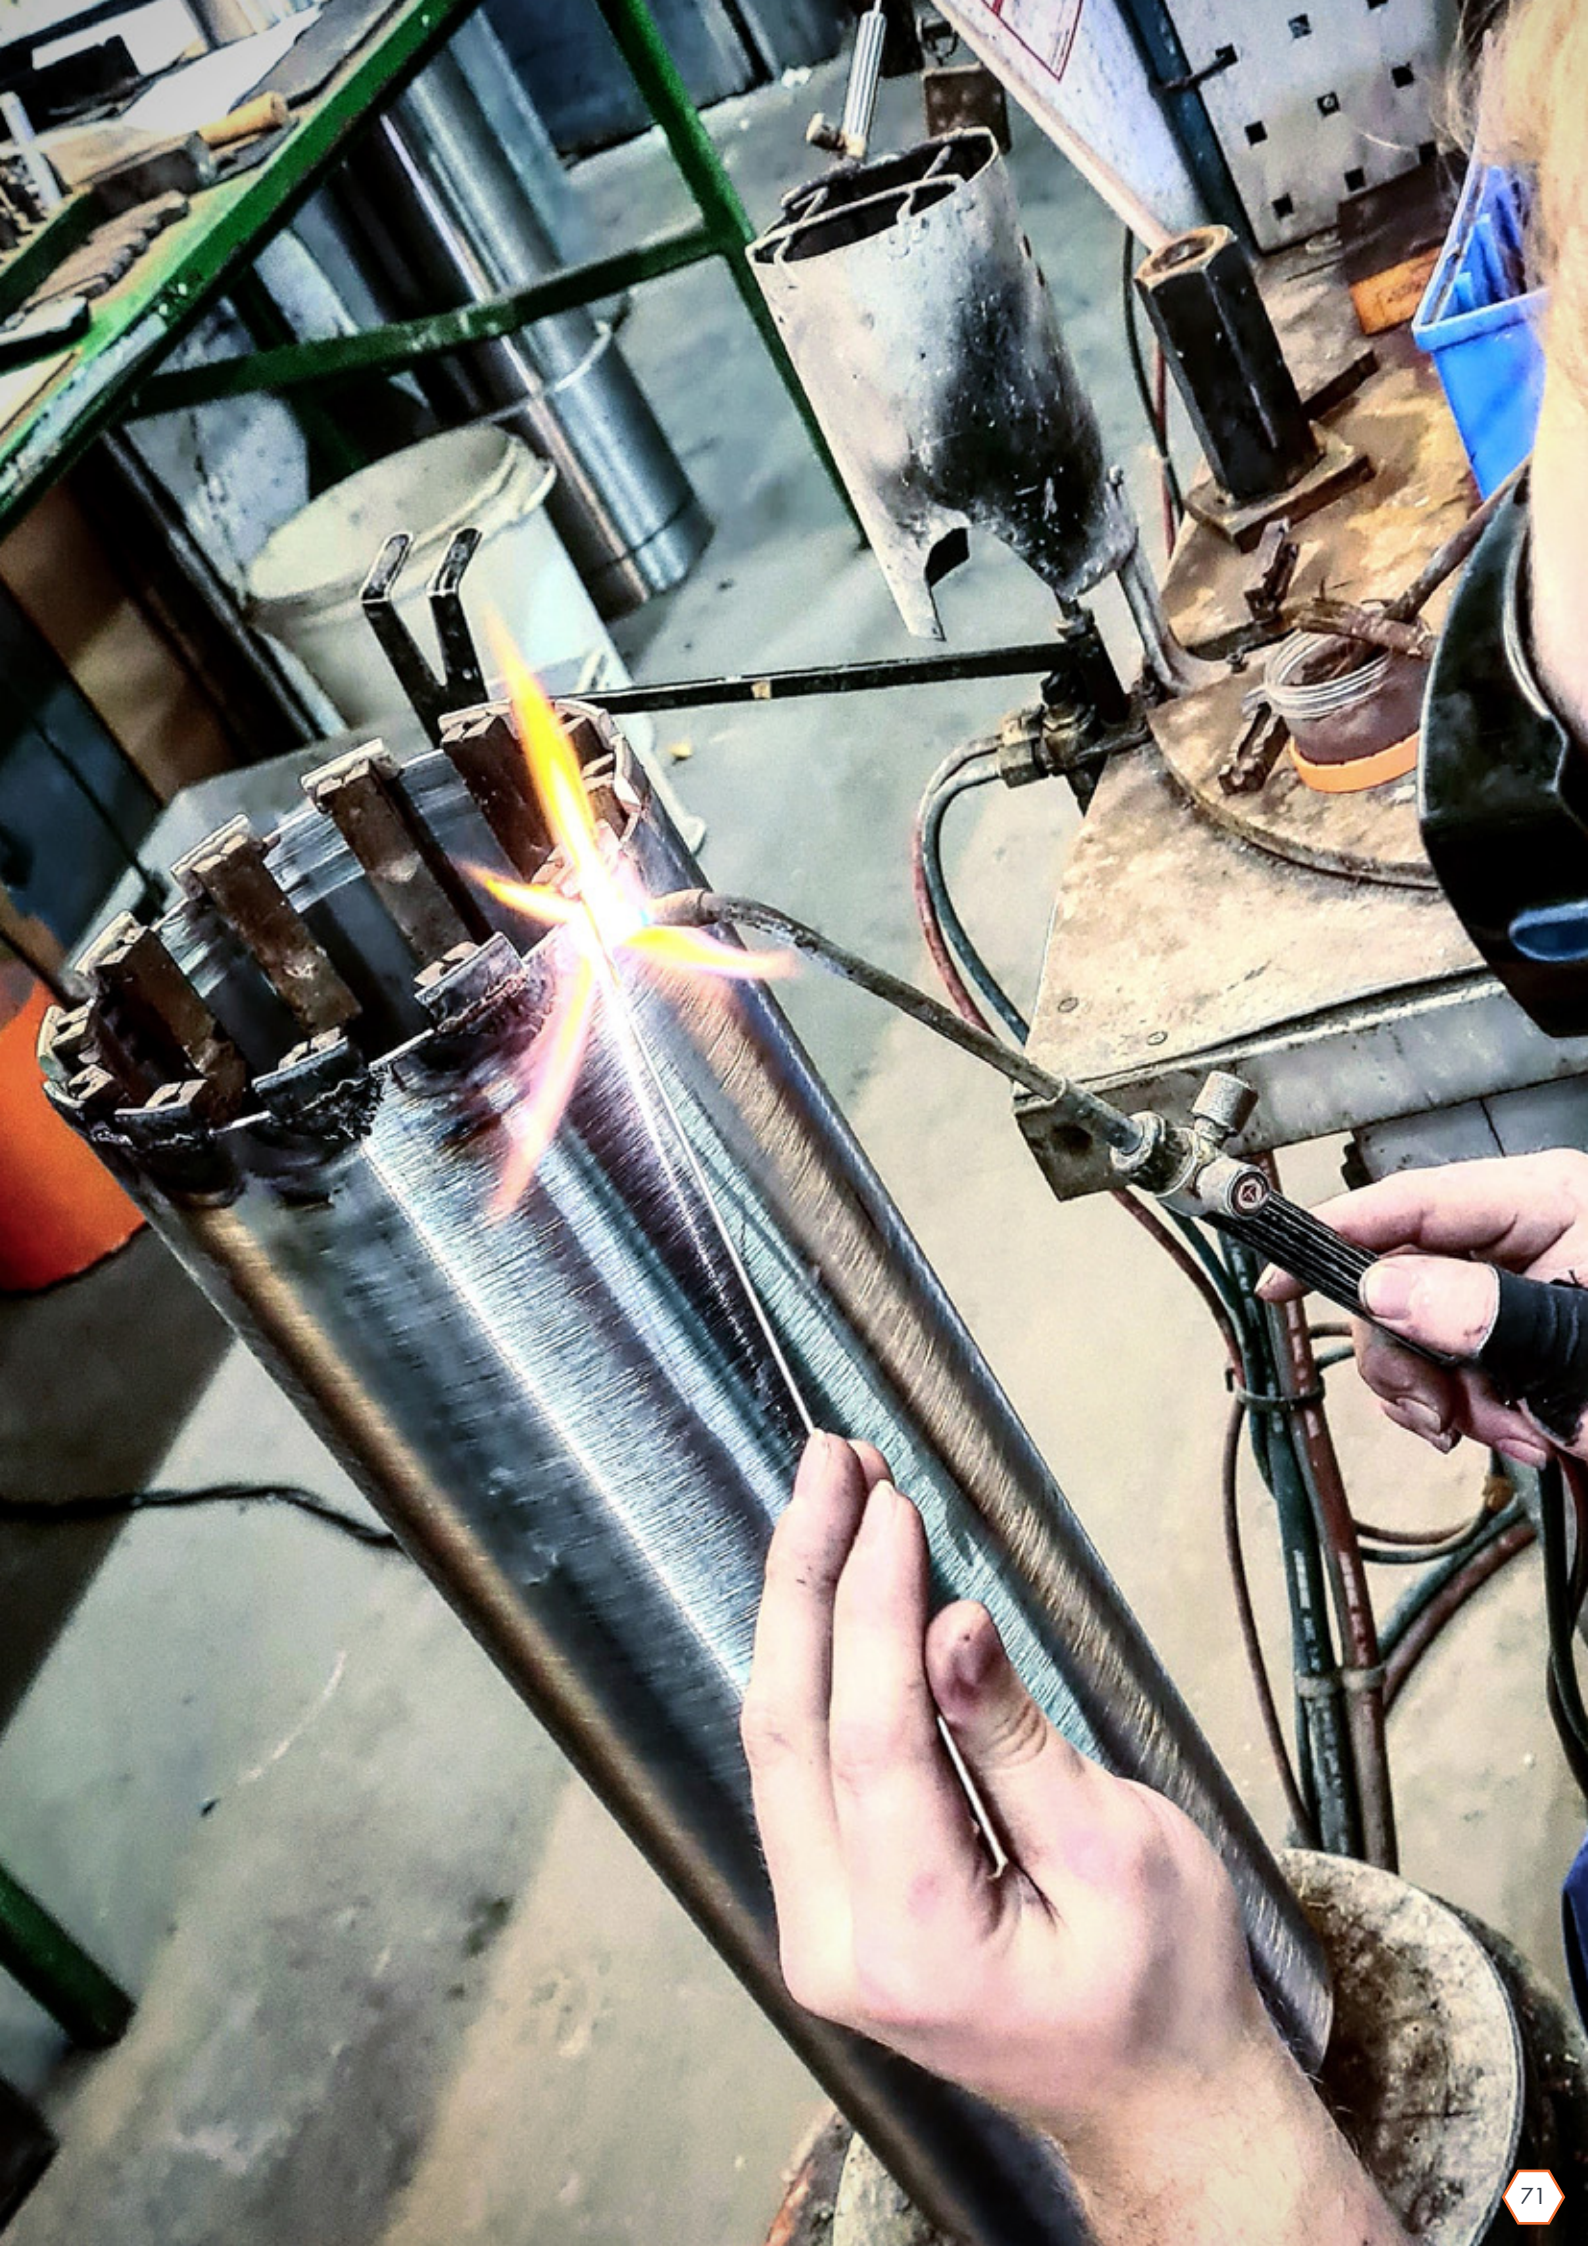

R 1/2", DIAMOND DRILL BITS



RM40 Standard Concrete

- Easy drilling, good life
- 10 mm segment height / roof segment
- Concrete, reinforced concrete, brickwork

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
25	400	16	3,0	10	3	D520 450 4025	70,00	36,00
28	400	16	3,0	10	3	D520 450 4028	70,00	36,00
32	400	16	3,0	10	4	D520 450 4032	75,00	45,00
35	400	16	3,0	10	4	D520 450 4035	79,00	45,00
38	400	16	3,0	10	4	D520 450 4038	82,00	56,00
42	400	16	3,0	10	5	D520 450 4042	89,00	56,00
45	400	24	3,5	10	4	D520 450 4045	89,00	46,00
52	400	24	3,5	10	5	D520 450 4052	98,00	56,00
56	400	24	3,5	10	5	D520 450 4056	102,00	56,00
62	400	24	3,5	10	6	D520 450 4062	108,00	66,00
66	400	24	3,5	10	6	D520 450 4066	116,00	66,00
72	400	24	3,5	10	6	D520 450 4072	126,00	66,00
76	400	24	3,5	10	7	D520 450 4076	132,00	77,00
82	400	24	3,5	10	7	D520 450 4082	133,00	77,00
87	400	24	3,5	10	8	D520 450 4087	136,00	87,00
92	400	24	3,5	10	8	D520 450 4092	150,00	87,00
102	400	24	3,5	10	9	D520 450 4102	155,00	98,00
108	400	24	3,5	10	9	D520 450 4108	169,00	98,00
112	400	24	4,0	10	9	D520 450 4112	169,00	112,00
122	400	24	4,0	10	10	D520 450 4122	184,00	116,00
132	400	24	4,0	10	10	D520 450 4132	187,00	116,00
142	400	24	4,0	10	11	D520 450 4142	214,00	127,00
152	400	24	4,0	10	12	D520 450 4152	228,00	138,00
162	400	24	4,0	10	12	D520 450 4162	242,00	138,00

Order key retipping: R 500 450 0 --- continue with digits for diameter

Other Diameters and lengths available on request!

DIAMOND DRILL BITS, R 1/2"

RM52 Premium Concrete

- 10 mm segment height / roof segment
- very hard concrete, reinforced concrete, brickwork
- **Order key: D520 540 —; Order key retipping: R500 540 0—**

RM65 Premium

- High-end segment, good drilling performance, long life
- 10 mm segment height / roof segment
- Reinforced concrete
- **Order key: D520 560 —; Order key retipping: R500 560 0—**

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
25	400	16	3,0	10	3	--- 4025	70,00	40,00
32	400	16	3,0	10	4	--- 4032	79,00	52,00
35	400	16	3,0	10	4	--- 4035	84,00	52,00
42	400	16	3,0	10	5	--- 4042	95,00	63,00
45	400	24	3,5	10	4	--- 4045	103,00	55,00
52	400	24	3,5	10	5	--- 4052	104,00	68,00
56	400	24	3,5	10	5	--- 4056	107,00	68,00
62	400	24	3,5	10	6	--- 4062	115,00	81,00
66	400	24	3,5	10	6	--- 4066	121,00	81,00
72	400	24	3,5	10	6	--- 4072	132,00	81,00
76	400	24	3,5	10	7	--- 4076	139,00	95,00
82	400	24	3,5	10	7	--- 4082	139,00	95,00
92	400	24	3,5	10	8	--- 4092	149,00	108,00
102	400	24	3,5	10	9	--- 4102	163,00	119,00
112	400	24	4,0	10	9	--- 4112	175,00	119,00
122	400	24	4,0	10	10	--- 4122	187,00	132,00
132	400	24	4,0	10	10	--- 4132	190,00	132,00
142	400	24	4,0	10	11	--- 4142	218,00	144,00
152	400	24	4,0	10	12	--- 4152	232,00	157,00

Other Diameters and lengths available on request!



DIAMOND DRILL BITS, GÖLZ 3-HOLE FLANGE



KN57 Premium Concrete

- Sewer Construction
- 10 mm segment height / roof segment
- Concrete, reinforced concrete, brickwork

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
112	300	24	4,0	10	9	D530 402 3112	174,00	98,00
127	300	24	4,0	10	10	D530 402 3127	198,00	116,00
138	300	24	4,0	10	11	D530 402 3138	215,00	128,00
152	300	24	4,0	10	12	D530 402 3152	229,00	139,00
162	300	24	4,0	10	12	D530 402 3162	233,00	139,00
167	300	24	4,0	10	12	D530 402 3167	242,00	145,00
172	300	24	4,0	10	13	D530 402 3172	244,00	150,00
182	300	24	4,0	10	13	D530 402 3182	252,00	150,00
186	300	24	4,0	10	13	D530 402 3186	269,00	150,00
200	300	24	4,0	10	14	D530 402 3200	285,00	161,00
212	300	24	4,0	10	15	D530 402 3212	385,00	172,00
226	300	24	4,0	10	15	D530 402 3226	379,00	172,00
232	300	24	4,0	10	15	D530 402 3232	376,00	172,00
257	300	24	4,0	10	15	D530 402 3257	425,00	172,00
297	300	24	4,5	10	18	D530 402 3297	485,00	220,00
354	300	24	4,5	10	20	D530 402 3354	580,00	244,00

Order key retipping: R 500 402 0 --- continue with digits for diameter
Other Diameters and lengths available on request!

KN55-A Premium Concrete


- Special version for KB300 Battery
- Sewer Construction
- Concrete, reinforced concrete, brickwork



Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
112	300	24	4,0	10	8	D530 405 3112	168,00	90,00
152	300	24	4,0	10	9	D530 405 3152	225,00	100,00
162	300	24	4,0	10	9	D530 405 3162	227,00	100,00
172	300	24	4,0	10	12	D530 405 3172	237,00	133,00
182	300	24	4,0	10	12	D530 405 3182	245,00	133,00
186	300	24	4,0	10	12	D530 405 3186	250,00	133,00
200	300	24	4,0	10	13	D530 405 3200	275,00	143,00
257	300	24	4,0	10	14	D530 405 3257	415,00	154,00

Order key retipping: R 500 405 0 --- continue with digits for diameter
Other Diameters and lengths available on request!

Sewer Connection material	Size (mm)	Outer Drilling-Ø (mm)
PVC	100	112
PVC	125	127
PVC	150	162
PVC	200	200
Vitrified Clay	ST DN 150	172
Vitrified Clay	B DN 150	172
Vitrified Clay	B DN 200	232
Vitrified Clay	DN 150	200
Vitrified Clay	DN 200	257
Concrete	150	232
Concrete	225	330

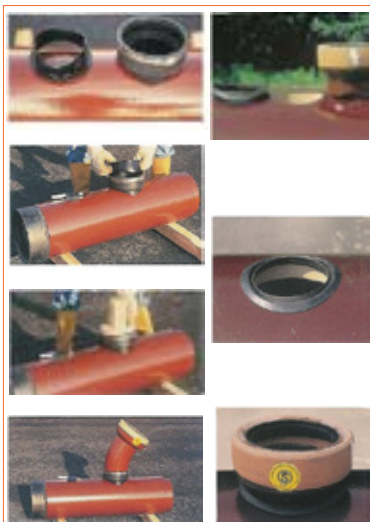

GÖLZ 3-HOLE FLANGE, DIAMOND DRILL BITS

DIAMOND DRILL BITS FOR TEST CORING

10 mm Roof segment



KN57 Test Coring Concrete

- on powerful core drilling-machines
- Core sampling in concrete with light to medium reinforcement

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
108	400	24	4,0	10	9	D530 402 4107	175,00	105,00
158	400	24	4,0	10	12	D530 402 4158	268,00	145,00
208	400	24	4,0	10	14	D530 402 4208	353,00	161,00

Order key retipping: R 500 450 0 --- continue with digits for diameter

KH 95 Test Coring Asphalt


- Connection GÖLZ 3-hole Flange
- For powerful core drilling machines
- Core sampling in asphalt

Ø (mm)	Length (mm)	Segment (mm)				Order number	Drill Bit€	Re- tipping €
		L	B	H	#			
108	400	24	4,0	10	9	D530 800 4108	193,00	127,00
158	400	24	4,0	10	12	D530 800 4158	290,00	171,00
208	400	24	4,0	10	14	D530 800 4208	388,00	210,00

Order key retipping: R 500 800 0 --- continue with digits for diameter



DRILL BITS - RPM RECOMMENDATION CHART

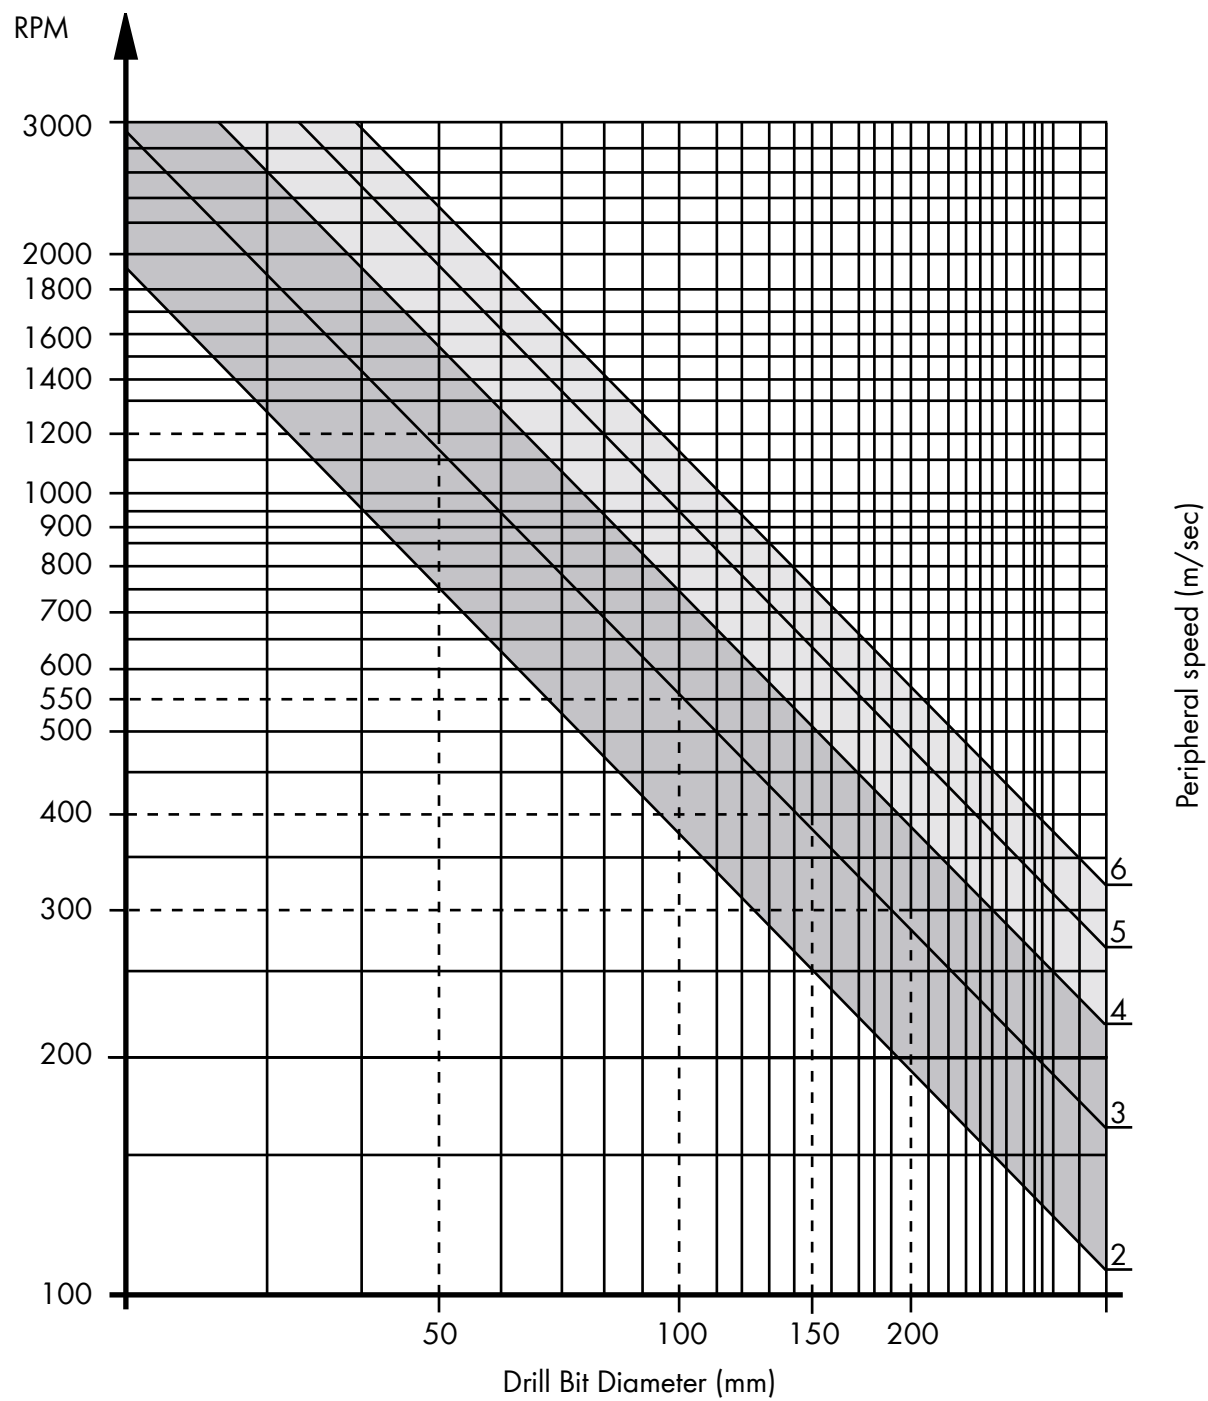

Best drilling performance:
in concrete and reinforced concrete: 2-4 m/sec
in abrasive material
(sandstone/asphalt): 4-6 m/sec

Recommended coolant flow	
Ø (mm)	l/min
20 - 30	approx. 0,5 - 1,0
40 - 52	approx. 1,0 - 2,0
62 - 82	approx. 2,0 - 3,0
92 - 162	approx. 3,0 - 4,0
172 - 250	approx. 4,0 - 5,0
300 - 350	approx. 6,0 - 8,0
400 - 500	approx. 8,0 - 10,0

DRILL BIT SEGMENTS



RM40 Concrete Standard

- Easy drilling, good life
- 10 mm segment height / roof segment
- Concrete, reinforced concrete, brickwork

Drilling Range (mm)	Segment (mm)			Order number	Price €
	L	W	H		
25	16	3,0	10	0496 101 3025	5,60
32 - 42	16	3,0	10	0496 101 3035	5,60
42 - 56	24	3,5	10	0496 101 3052	5,90
62 - 72	24	3,5	10	0496 101 3067	5,90
76 - 92	24	3,5	10	0496 101 3087	5,90
92 - 112	24	3,5	10	0496 101 3101	5,90
92 - 112	24	4,0	10	0496 101 3102	5,90
122 - 172	24	4,0	10	0496 101 3140	5,90
182 - 250	24	4,0	10	0496 101 3210	5,90
260 - 600	24	4,5	10	0496 101 3264	6,10

RML60 Concrete Standard

- Good speed, good life
- 12 mm turbo segment
- Concrete, reinforced concrete, brickwork



Drilling Range (mm)	Segment (mm)			Order number	Price €
	L	W	H		
38 - 42	20	3,5	12	0496 100 7035	5,70
46 - 56	24	3,5	12	0496 100 7052	6,10
62 - 72	24	3,5	12	0496 100 7067	6,10
76 - 92	24	3,5	12	0496 100 7087	6,10
92 - 112	24	3,5	12	0496 100 7101	6,10
122 - 172	24	4,0	12	0496 100 7140	6,10
182 - 250	24	4,0	12	0496 100 7210	6,10
260 - 400	24	4,5	12	0496 100 7264	6,50

DRILL BIT SEGMENTS

GALAXIS TECHNOLOGY |

SYSTEMATIC DIAMOND ARRANGEMENT

RM30

- 10 mm High-end segment
- Heavy reinforced concrete, granite, ductile cast pipes, steel

RM52

- 10 mm High-end segment
- concrete, reinforced concrete, middle-hard brickwork

RM65

- 10 mm High-end segment
- reinforced concrete-flint

Drilling Range (mm)	Segment (mm)			RM30 Order number	RM52 Order number	RM65 Order number	Price €
	L	W	H				
25	16	3,0	10	0496 101 2025	0496 101 4025	0496 101 6025	6,35
32 - 42	16	3,0	10	0496 101 2035	0496 101 4035	0496 101 6035	6,35
42 - 56	24	3,5	10	0496 101 2052	0496 101 4052	0496 101 6052	7,50
62 - 72	24	3,5	10	0496 101 2067	0496 101 4067	0496 101 6067	7,50
76 - 92	24	3,5	10	0496 101 2087	0496 101 4087	0496 101 6087	7,50
92 - 112	24	3,5	10	0496 101 2101	0496 101 4101	0496 101 6101	7,50
92 - 112	24	4,0	10	0496 101 2102	0496 101 4102	0496 101 6102	7,50
122 - 172	24	4,0	10	0496 101 2140	0496 101 4140	0496 101 6140	7,50
182 - 250	24	4,0	10	0496 101 2210	0496 101 4210	0496 101 6210	7,50
260 - 600	24	4,5	10	0496 101 2264	0496 101 4264	0496 101 6264	8,00
500 - 1200	24	5,5	10	0496 101 2265	0496 101 4265	0496 101 6265	8,35



RGX50

GALAXIS TECHNOLOGY

- good life, Roof segments allow an easier start of drilling
- high drilling speed, for drill motors from 3 kW
- 12 mm segment height
- Concrete, reinforced concrete

Drilling Range (mm)	Segment (mm)			Order number	Price €
	L	W	H		
42 - 56	24	3,5	10+2	0496 101 0052	7,50
62 - 72	24	3,5	10+2	0496 101 0067	7,50
76 - 92	24	3,5	10+2	0496 101 0087	7,50
92 - 112	24	3,5	10+2	0496 101 0101	7,50
92 - 112	24	4,0	10+2	0496 101 0102	7,50
122 - 172	24	4,0	10+2	0496 101 0140	7,50
182 - 250	24	4,0	10+2	0496 101 0210	7,50
182 - 250	24	4,5	10+2	0496 101 0211	8,00
260 - 600	24	4,5	10+2	0496 101 0264	8,00
260 - 600	24	5,0	10+2	0496 101 0265	8,50
600 - 1200	24	5,5	10+2	0496 101 0600	9,00

CROWN SEGMENTS

RS75 Crown segment - Premium

- 7 mm segment height
- concrete, reinforced concrete, brickwork



Drilling Range (mm)	Segment (mm)			Order number	Price €
	L	W	H		
10		2,5	7	0296 100 0810	18,00
12		2,5	7	0296 100 0812	19,00
14		2,5	7	0296 100 0814	21,00
15		2,5	7	0296 100 0815	22,00
16		2,5	7	0296 100 0816	22,00
18		2,5	7	0296 100 0818	23,00
20		2,5	7	0296 100 0820	26,00
22		2,5	7	0296 100 0822	26,00
24		2,5	7	0296 100 0824	27,00
25		2,5	7	0296 100 0825	27,00
26		2,5	7	0296 100 0826	27,00
28		2,5	7	0296 100 0828	28,00
30		2,5	7	0296 100 0830	29,00
32		2,5	7	0296 100 0832	33,00
35		2,5	7	0296 100 0835	34,00
36		2,5	7	0296 100 0836	34,00
38		2,5	7	0296 100 0838	36,00
40		2,5	7	0296 100 0840	36,00
50		2,5	7	0296 100 0850	43,00

ACCESSORIES

ADAPTERS | DRILL EXTENTIONS



Adapters		Order number	Price €
GÖLZ 3-hole-Flange	Outer thread 1 1/4" UNC	0296 000 0001	60,00
Inner thread 1 1/4" UNC	GÖLZ 3-hole-Flange	0296 000 0011	34,00
Inner thread 1 1/4" UNC	Inner thread R 1/2"	0296 000 0014	23,00
Inner thread 1 1/4" UNC	4 hole bayonet flange	0296 000 0111	55,00
Outer thread R 1/2"	Outer thread 1 1/4" UNC	0296 000 0029	22,00
M41	Polygon PQ6, inner	0296 000 0148	18,00
Machine Polygon PQ6	Outer thread 1 1/4" UNC	0296 000 0149	50,00
Inner thread 1 1/4" UNC	Drill Bit Polygon PQ6, outer	0296 000 0150	202,00



Drill Extentions, Connection 1 1/4" UNC (suitable as of Ø 52 mm)			
Name	Length (mm)	Order number	Price €
1 1/4" UNC threaded	100	0296 000 0041	28,00
1 1/4" UNC threaded	200	0296 000 0042	35,00
1 1/4" UNC threaded	300	0296 000 0043	43,00
1 1/4" UNC threaded	400	0296 000 0044	51,00
1 1/4" UNC threaded	500	0296 000 0045	69,00



Drill Extentions, Connection R 1/2" (suitable as of Ø 32 mm)			
Name	Length (mm)	Order number	Price €
R 1/2" threaded	100	0296 000 0061	26,00
R 1/2" threaded	200	0296 000 0062	31,00
R 1/2" threaded	300	0296 000 0063	46,00

ACCESSORIES

ADAPTERS | BRAZING AND RE-TIPPING EQUIPMENT

Drill Extentions, Connection GÖLZ 3 hole flange (suitable as of Ø 112 mm)

Name	Length (mm)	Order number	Price €
GÖLZ 3-hole-Flange	100	0296 000 0051	123,00
GÖLZ 3-hole-Flange	200	0296 000 0052	132,00
GÖLZ 3-hole-Flange	300	0296 000 0053	145,00
GÖLZ 3-hole-Flange	400	0296 000 0054	161,00



Brazing and re-tipping equipment

	Order number	Price €
Soldering Magnet, excess 0,50/1,25mm	0267 110 0036	38,00
Soldering Magnet, excess 0,75/1,00mm	0267 110 0037	38,00
Four Step Magnet (0,5 / 0,75 / 1,00 / 1,25 mm)	0267 110 0041	75,00
special silver solder Ø 1,5 mm	0267 110 0035	on request
Flux 0,1 kg Filling	0298 000 0978	15,00



DIAMOND WIRE



Diamond Wire 10,5 - 11 mm, for wire saws				
Type Order no.	Ø (mm)	Bits per m	Information	Price €
DS125	10,5	40	Premium quick cut set, rubberized with spring, for concrete, reinforced concrete, also highly reinforced	130,00



Diamond Wire 8,8 mm, for wire saws from 3,3 kW				
Type Order no.	Ø (mm)	Bits per m	Information	Price €
DS 88	8,8	40	Thin high-speed wire in concrete, reinforced concrete and brickwork. Specially for low power wire saws	166,00

ACCESSORIES



Information	Order number	Price €
joint locking GV 11	0283 100 5504	44,00
Bold for joint locking	0283 100 5503	3,80
Steel straight coupler PH11	0283 100 5529	3,30
Steel straight coupler PH8	0283 100 5530	5,80
Screw connectors 8 mm / 3,8 mm	0283 100 5532	7,50
Pressing Tong Hydr. 8t incl. spare jaw to pressing tong MK9-50 for wire 10,5 mm	0283 100 0330	2.990,00
spare jaw to pressing tong MK9-50	0283 100 0337	129,00
spare jaw to pressing tong MK7-50 for wire 8,8 mm	0283 100 0335	129,00

TERMS AND CONDITIONS OF SALE AND DELIVERY

§ 1 General provisions

(1) The following terms and conditions, in the version applicable at the time of conclusion of the contract, shall apply to all our deliveries and services in business with the customer. Other terms and conditions of the other party, in particular in General Terms and Conditions, are rejected unless they are expressly agreed to.
(2) Verbal collateral agreements made by our representatives or employees do not exist.
Agreements deviating from these Terms and Conditions shall only be binding if expressly confirmed by us in writing.

§ 2 Contracting party

The contracting partner is GÖLZ Ges.m.b.H., represented by their managing directors Donghai Zheng and Klaus Schlor, Samstraße 52, A-5020 Salzburg, registered in the Commercial Register (FN62605t) of the District Court of Salzburg.

§ 3 Conclusion of contract

Our offers are subject to change and non-binding. Orders shall only be deemed accepted when we confirm the order in writing. The confirmation is decisive for the content of the delivery contract.

§ 4 Prices

(1) Orders shall be invoiced in EURO at the prices agreed in the confirmation letter. For deliveries without agreement of fixed prices, the prices valid in our company on the day of delivery shall be invoiced.
(2) The prices quoted by us shall only apply to the individual order.
(3) Our prices are calculated ex works excluding VAT, customs duty, freight, shipping packaging and insurance. These costs shall be borne additionally by the Customer even if they are not specifically shown on the invoice.

§ 5 Packaging

The type of packaging shall be in accordance with our proper determination and shall be calculated at cost price.

§ 6 Return of goods

These generally require our verbal or written consent.
If we accept returns, a handling fee of 10% of the invoice value will be deducted when the credit note is issued. A return of used products is principally excluded.

§ 7 Shipping

(1) Shipping shall be at the expense and risk of the Customer, unless otherwise agreed in writing.
(2) Unless otherwise agreed in writing, we shall determine the means and route of transport without being responsible for choosing the fastest and cheapest option.
(3) Special requests of the Customer (e.g., accelerated shipping method, special packaging, commissioning of a specific freight forwarder) shall be taken into account as far as possible against invoicing of possible additional costs.
(4) The risk of loss shall pass to the Customer when the item has left the supplier's factory, even if partial deliveries are made or the Supplier has taken over the transport.

§ 8 Delivery

(1) Information on the delivery time shall be understood as estimated delivery times. The date of delivery is complied with when the delivery goods have left our plant or readiness for shipment has been notified. Compliance with the delivery time is subject to correct and timely self-delivery.
(2) If delivery is not possible as a result of circumstances beyond our control, e.g., natural disasters, war, riot, intervention by public authorities, energy shortages or industrial action, the delivery time shall be extended by the duration of these circumstances. During this period, the Supplier shall be released from any liability for damages or from any other contractual remedy for breach of contract.
(3) Unless otherwise agreed, the parties expressly agree that the contract may be terminated by either party if the duration of the obstacles has exceeded 120 days.
(4) Upon request of the Customer, we shall declare whether we will terminate the contract or deliver within a reasonable period to be determined by us.
(5) If the Customer is in default of acceptance, fails to cooperate or if our delivery is delayed for other reasons for which the Customer is responsible, the Supplier shall be entitled to demand compensation for the damages resulting therefrom including additional expenses (storage costs).

§ 9 Payments

(1) Our invoices are payable net, unless otherwise agreed in writing.
(2) All payments shall be made free of charge. Bank, discount and collection charges shall be borne by the customer.
(3) Payments shall always be offset against the oldest invoice due. The Customer may only offset claims that are undisputed or have been legally established.
(4) Payments by bill of exchange and cheque require prior agreement. They shall only be accepted on account of performance and shall only be deemed to be payment if they have been cashed and irrevocably credited to the Supplier's account.
(5) If the payment target is exceeded, we shall be entitled to charge interest at the statutory rate from this point in time, even without a reminder. The Customer reserves the right to prove that there was less or no interest loss. In the event of default, we reserve the right to claim further damage caused by default.
(6) Payments may only be made to our company or to persons expressly legitimised in writing or through power for collection.

§ 10 Warranty

(1) For material defects we exclusively assume warranty as follows:
a) All those parts which turn out to be defective as a result of a circumstance prior to the transfer of risk shall be repaired or resupplied free of charge at the Supplier's discretion.
b) The Supplier shall be notified immediately in writing of the discovery of such defects.
c) Replaced parts shall become the property of the Supplier.
d) The Customer shall, after consultation with the Supplier, grant a reasonable period of time for the subsequent performance of all repairs and/or replacement deliveries deemed necessary by the Supplier; otherwise, the Customer shall not be entitled to any warranty rights.
e) If the subsequent performance fails, the Customer shall have the right to withdraw from the delivery contract or to reduce the contract price, at the Customer's discretion.
f) If the Customer or a third party carries out improper repairs, the Supplier shall not be liable for the consequences resulting therefrom.

(2) For defects of title we exclusively assume warranty as follows:

a) If the use of the delivery item leads to the infringement of industrial property rights in Germany, the Supplier shall, at his own expense, generally procure for the Customer the right to continue using the delivery item or modify the delivery item in a manner reasonable for the Customer in such a way that the infringement of industrial property rights no longer exists.
b) If this is not possible on commercially reasonable terms or within a reasonable period of time, the Customer shall be entitled to withdraw from the contract. Under the aforementioned conditions, the supplier shall also be entitled to withdraw from the contract.
c) In addition, the Supplier shall indemnify the Customer from undisputed or legally established claims of the respective property right holders.
d) The aforementioned obligations shall only exist if the Customer informs the Supplier immediately of the asserted infringements of industrial property rights or copyrights, if the Customer supports the Supplier to a reasonable extent in the defence against the asserted claims and if he enables the Supplier to carry out the modification measures.

§ 11 Liability

(1) In the event of pre-contractual infringements of obligations or infringements of secondary obligations on the part of the Supplier, the Customer shall primarily be entitled to a subsequent performance claim. If this fails, the Customer can withdraw from the contract.
(2) For any damage that has not occurred to the delivery item itself, the Supplier shall only be liable
- in the event of intent,
- in the event of gross negligence on the part of the user, his legal representatives and managing vicarious agents as well as his ordinary vicarious agents
- in the event of culpable injury to life, limb or health,
- in the event of defects which he has fraudulently concealed or the absence of which he has guaranteed.
In the event of culpable infringement of material contractual obligations, the Supplier shall also be liable in the event of gross negligence on the part of non-executive employees and in the event of minor negligence, in the latter case limited to reasonably foreseeable damage typical for the contract. Further claims are excluded.
(3) In addition, the Supplier shall be liable for defects of the delivery item insofar as liability for personal injury or property damage is provided for under the Product Liability Act.

§ 12 Prescription

Claims for defects shall prescribe after twelve months. Claims for damages due to injury to life, limb or health, as a result of grossly negligent, intentional or fraudulent conduct, as well as claims under the Product Liability Act are excluded from the shortened prescription period.

§ 13 Retention of title

(1) The Supplier shall retain title to the delivery item until all outstanding claims - also from other deliveries and services on the part of the Supplier to the Customer - have been settled.
(2) The Customer may sell the delivery goods, to which we have retained title, in the ordinary course of business, unless he is in default of payment or has suspended payments. If the Customer sells the delivery goods, he hereby assigns, to our company, in order to settle all our claims, the rights against his customers to which he is entitled from the sale, together with all ancillary rights and securities. The Customer may collect the claims assigned to our company subject to revocation unless he is in default of payment or has suspended payments. If there are already claims against third parties arising from damage to or loss of the not yet fully paid delivery goods, the Customer hereby assigns, to our company, his claim for payment arising therefrom.
(3) If the Customer's claims from the resale of our reserved goods are included in a current account, he hereby assigns, to our company, his claim for payment in the amount of the respective and recognised balance, namely in the amount of our claim against the Customer. If the value of the security granted to our company exceeds our claim against the Customer by more than 20%, we shall be obliged to release the claim upon the customer's request.
(4) The Customer may not pledge the delivery goods or assign them as security.
Pledging of the delivery goods must be immediately reported to us, enclosing the pledging report (copy).
(5) Insurance of the delivery item against transport damage, theft or other insurable risks shall only be taken out upon the express request and at the expense of the Customer.
(6) If, in the case of deliveries (of the reserved goods) abroad, certain measures have to be taken by the Customer in the importing country in order to give effect to the rights and obligations referred to in No. 2 and No. 3 (extended retention of title), this shall be done at the expense of the Customer.
(7) Should our retention of title lose its validity in the case of deliveries abroad, the Customer shall be obliged, at his own expense, to immediately provide us with other security for the reserved goods or any other security for our claim which is effective under the law applicable to the Customer's place of business, and which comes as close as possible to the retention of title under German law.
(8) In the event of breach of contract by the Customer, in particular in the event of default in payment, the supplier shall be entitled to take back the delivery item after issuing a reminder and the Customer shall be obliged to surrender it. Taking back or pledging the reserved goods by the Supplier does not constitute a withdrawal from the contract unless this is expressly declared by us.
(9) The application for the opening of insolvency proceedings entitles the Supplier to withdraw from the contract and to claim the immediate return of the delivery item.

§ 14 Place of performance and place of jurisdiction

(1) Place of performance for deliveries, services and payments be our headquarter in Hellenthal/ Germany or our subsidiary in Salzburg/Austria.
(2) The exclusive place of jurisdiction for all litigations, including suits filed in connection with cheques and bills of exchange, shall be Salzburg. We reserve the right to sue at the customer's place of business, too.
(3) For all business relations between the ordering party and us Austrian Law shall apply, except however the provisions of the Uniform Law on the International Sale of Goods and the UN Convention on Contracts for the International Sale of Goods.
(4) As far as allowed by law, Salzburg shall be agreed upon to be the exclusive place of jurisdiction for all disputes arising, also arising from disputes regarding bills of exchange or cheques. We also reserve the right to institute legal proceedings at the domicile of the ordering party.

§ 15 Final provisions

(1) The Customer is not entitled to assign his claims against the Supplier to third parties.
(2) Should one or more provisions of these General Terms and Conditions be or become invalid, this shall not affect the validity of all other provisions and agreements. Should a regulation be ineffective in whole or in part, the contracting parties shall replace or supplement it with appropriate regulations that correspond to the economic purpose of the intended regulation.

GÖLZ® - Group

Gölz Ges.m.b.H.

Samstraße 52 | A-5020 Salzburg

Telefon +43 662 438175 | Fax +43 662 430734

info@goelz.at | www.goelz.at

DEUTSCHLAND

GÖLZ GmbH

Dommersbach 51 | 53940 Hellenthal

Telefon +49 2482 12-0 | Fax +49 2482 12-222

info@goelz.de | www.goelz.de

FRANKREICH

Gölz S.A.S.

1, rue de la Mairie | F-67370 Berstett

Telefon +33 3 88 59 43 00 | Fax +33 3 88 59 47 77

info@golz.fr | www.golz.fr

GROSSBRITANNIEN

Golz (UK) Ltd.

Unit A5 | Springhead, Enterprise Park

Northfleet | Kent DA 11 8HB

Telefon +44 1 474 321 679 | Fax +44 1 474 321 477

info@goelz.co.uk | www.golzuk.com

BENELUX

Gölz Benelux N.V. Belgien

Eupener Straße 61 | B-4731 Raeren-Eynatten

Telefon +32 87 55 23 49 | Fax +32 13 78 33 28

benelux@goelz.de | www.golzgroup.com

USA

Golz L.L.C.

5860 East Osage Ridge Lane | Columbia MO 65203-6018

info@golzusa.com | www.golzgroup.com

Find us at „golzgroup“



**Specialist group of
German diamond
tool manufacturers
in the VDS**



Your GÖLZ Dealer

